



HollySys

Industrial Automation with PLC



LM MICRO SERIES PLC Selection Guide

Features Highlights

Powerful CPU and Analogue Processing

The CPU calculation speed for a single boolean instruction is 0.37µs. It can simultaneously process dozens of analog channels and multiple loops of PID (proportional Integral Derivative) calculations.

Compact In Size

LM Micro Series PLC provides a tight integration of hardware and a complete range of functions within a compact size module.

Diversity of Modules

Adopting a modular design, LM Micro Series PLC is consisted of a diversity of CPU modules and expansion modules to meet the application needs of different fields. A CPU module working with a maximum of 7 expansion modules supports up to 152 digital I/O points or 56 analogue I/O channels.

Flexible System Configuration

LM Micro Series PLC utilizes a flexible system configuration with a large portfolio of expansion modules such as digital I/O, analogue I/O and other dedicated functional modules. The digital expansion I/O modules are 4DI+4DO, 8DI, 16DI, and 16DO. The analogue I/O modules are 4-channel input, 8-channel input, 4-channel thermocouple input, 4-channel thermal resistance input, 8-channel thermistor input and 2-channel output that are used to receive current, voltage, thermocouple, thermistor, thermal resistance and many other types of signals. The dedicated communication modules are the PROFIBUS-DP slave modules and the Ethernet slave modules.

Communications

Various communication interfaces such as RS-232, RS-485, PROFIBUS-DP and Ethernet are employed for the connection with other systems.

Easy Installation and Wiring

LM Micro Series PLC can be easily mounted on walls or standard DIN rails. The space-saving, patented WAGO wiring terminals are employed to ensure solid and firm wiring.

Data Loss Protection

Instructions and command data of the user are stored in a permanent storage area to prevent data loss caused by power loss or other failures.

Standard Programming Language

PowerPro, the programming software for the system that complies with IEC61131-3 international standard, represents the latest industrial PLC programming trend. Six programming languages are available including LD, FBD, IL, ST, SFC and CFC.

Rich Function Blocks and Instructions

The system is provided with over 400 function blocks and many other instructions tailored according to needs of users. Common instructions include arithmetic operation, evaluation, Boolean, shift, selection, compare, data type conversion, addressing, call, strings etc. Common function blocks include enhanced PID controller, signal generator, function manipulator, analogue processing, MODBUS, PROFIBUS, Ethernet, real-time clock, analogue potentiometer, watchdog, mono-phase and bi-phase counters, pulse output etc.

Off-line Simulation

Off-line simulation allows programmers to simulate, test and debug their programming logic before actual 'live' implementation. Simulation features such as single-step, single cycle, breakpoint debugging and etc, conveniently facilitate the debugging process. All these make programming much easier and more convenient since it is not required to connect the PLC and download the programming codes to hardware devices.

Typical Applications

The LM Micro Series PLC can be utilized in many areas of applications such as the machine tool, punching machinery, printing machinery, spinning machinery, packaging machinery, plastic machinery, environmental protection equipment, central air conditioning, latex industry and various production lines.

Certification



LM Micro series PLC modules are certified based on European standards EN61131-2 for electromagnetic compatibility testing and safety testing, EN60950-1:2001 low-voltage directives. The certification indicates that LM Micro series PLC products are in compliance with the safety, health, environmental and consumer protection requirements of the Member States of the European Union.



LM Micro Series PLC

1. The LM Micro Series PLC comprises various modules. The basic functional configuration requires a CPU module working as a base unit in complement with optional expansion modules such as communication modules, digital I/O modules and analogue I/O modules.

Product Selection List		
Modules	Product Code	Description
CPU	LM3104-CDT	14 Points , 8 digital DC input, 6 digital transistor DC output, 24 VDC Input Power Supply
	LM3105-CAR	14 Points , 8 digital DC input, 6 digital relay DC/AC output, 240 VAC Input Power Supply
	LM3106-CDT	24 Points , 14 digital DC input, 10 digital transistor DC output, 24 VDC Input Power Supply
	LM3107-CAR	24 Points , 14 digital DC Input, 10 digital relay DC/AC output, 240 VAC Input Power Supply
	LM3107E-CAR	23 Points Mix , 12 digital DC input, 8 digital relay DC/AC output, 2 analog input, 1 analog output, 240 VAC Input Power Supply
	LM3108-CDT	40 Points , 24 digital DC input, 16 digital transistor output, 24 VDC Input Power Supply
	LM3109-CAR	40 Points , 24 digital DC input, 16 digital DC/AC relay output, 240 VAC Input Power Supply
Communication	LM3401-EPFD	PROFIBUS-DP Slave station interface module
	LM3403-EETH	Ethernet interface module
Digital Input	LM3210-EDI	8 Points Expansion , 8 digital DC input
	LM3211-EDIA	8 Points Expansion , 8 digital AC input
	LM3212-EDI	16 Points Expansion , 16 digital DC input
Digital Output	LM3220-EDOT	8 Points Expansion , 8 digital transistor DC output
	LM3221-EDOT	16 Points Expansion , 16 digital transistor DC output
	LM3222-EDOR	8 Points Expansion , 8 digital relay DC/AC output
	LM3223-EDOR	16 Points Expansion , 16 digital relay DC/AC output
Digital Mix I/O	LM3230-EDMT	8 Points Mix Expansion , 4 digital DC input, 4 digital transistor DC output
	LM3231-EDMR	8 Points Mix Expansion , 4 digital DC input, 4 digital relay DC/AC output
Analog Input	LM3310-EAI	4 Channels Expansion , 4 analog input, pseudo-differential input, 12-bits resolution
	LM3310A-EAI	4 Channels Expansion , 4 analog input, single-ended input, 12-bits resolution
	LM3310B-EAI	4 Channels Expansion , 4 analog input, single-ended input, 16-bits resolution
	LM3311-EAI	4 Channels Expansion , 4 analog thermocouple input, J,K,E, N, T, B, R, S type, $\pm 80\text{mV}$
	LM3312-EAI	4 Channels Expansion , 4 analog RTD input, Cu50, Pt100
	LM3313-EAI	8 Channels Expansion , 8 analog input, single-ended input, 12-bits resolution
	LM3314-EAI	8 Channels Expansion , 8 analog NTC input, R=10K at 25°C, B value is selectable
Analog Output	LM3320-EAO	2 Channels Expansion , 2 analog output
Analog Mix I/O	LM3330-EAM	5 Channels Mix Expansion , 4 analog input, 1 analog output
Software & Cables	LM3800-COM2	2 meters RS-232 programming cable
	LM3600-PRO2	PowerPro programming software CD

2. We offer a wide range of CPU modules with different configuration to meet your automation needs. We provide various models with digital or analogue inputs and outputs, among which, the LM3107E-CAR model combines both digital and analogue I/Os in a single module.

CPU Modules							
Specifications	LM3104-CDT	LM3105-CAR	LM3106-CDT	LM3107-CAR	LM3108-CDT	LM3109-CAR	LM3107E-CAR
Digital input	8	8	14	14	24	24	12
Digital output	6 x transistor	6 x relay	10 x transistor	10 x relay	16 x transistor	16 x relay	8 x relay
Analog input	--	--	--	--	--	--	2
Analog output	--	--	--	--	--	--	1
Maximum number of expansion modules	2	2	4	4	7	7	4
Current limit +24VDC (for expansion Bus)	300mA	260mA	300mA	260mA	400mA	320mA	260mA
Current limit +5VDC (for expansion Bus)	800mA	800mA	800mA	800mA	1500mA	1300mA	800mA
Communication interface	1x RS-232 (non-isolation)				1x RS-232 and 1x RS-485 (non-isolation)		1x RS-232 (non-isolation)
Communication protocol	MODBUS RTU, G3 proprietary, or FreePort protocol						
High speed input counter	3 points 100KHz mono-phase input counters or 2 points 100KHz bi-phase input counters						
Pulse output	1 point, 20kHz	None	2 points, 20kHz	None	2 points, 20kHz	None	None
Timer	Unlimited number of timers, 1ms to 49 days						
Counter	Unlimited number of counters, 15 bits counting range						
Boolean execution speed	0.37 μ s per instruction						
Power Supply	21~27VDC	187 ~ 242VAC @ 47 ~ 63Hz	21~27VDC	187 ~ 242VAC @ 47 ~ 63Hz	21~27VDC	187 ~ 242VAC @ 47 ~ 63Hz	85 ~ 242VAC @ 47 ~ 63Hz
Dimension	125mm(L) x 90mm (W) x 70mm(H)				200mm(L) x 90mm (W) x 70mm(H)		125mm(L) x 90mm (W) x 70mm(H)

3. We offer various expansion digital inputs/outputs modules with either 8 or 16 points, among which, the LM3230-EDMT and LM3231-EDMR models both contain 4 DIs and 4 DOs within one module.

Expansion Digital I/O Modules			
Digital Input	DI		Dimension
LM3210-EDI	8 points, 0 ~ 30VDC		50mm(L) x 90mm (W) x 70mm(H)
LM3212-EDI	16 points, 0 ~ 30VDC		75mm(L) x 90mm (W) x 70mm(H)
LM3211-EDIA	8 points, 164~264VAC (50 / 60Hz)		75mm(L) x 90mm (W) x 70mm(H)
Digital Output	DO		Dimension
LM3220-EDOT	8 points, transistor DC output		50mm(L) x 90mm (W) x 70mm(H)
LM3221-EDOT	16 points, transistor DC output		75mm(L) x 90mm (W) x 70mm(H)
LM3222-EDOR	8 points, relay DC/AC output		50mm(L) x 90mm (W) x 70mm(H)
LM3223-EDOR	16 points, relay DC/AC output		75mm(L) x 90mm (W) x 70mm(H)
Digital Mix	DI	DO	Dimension
LM3230-EDMT	4 points, 0 ~ 30VDC	4 points, transistor DC output	50mm(L) x 90mm (W) x 70mm(H)
LM3231-EDMR	4 points, 0 ~ 30VDC	4 points, relay DC/AC output	50mm(L) x 90mm (W) x 70mm(H)

4. We also offer various expansion analogue inputs/output modules such as pseudo-differential, single ended, thermocouple, RTD, and NTC. Among all the models, the LM3330-EAM provides 4 channels of analogue inputs and a 1 channel of analogue output.

Expansion Analog I/O Modules						
Analog Input	AI		Resolution	Input Range (Voltage/Temperature)	Input Range (Current)	Dimension
LM3310-EAI	4 channels, Pseudo-Differential		12 bit A/D converter	0 ~ 10V	0 ~ 20mA / 4~20mA	75mm(L) x 90mm (W) x 70mm(H)
LM3310A-EAI	4 channels, Single-Ended		12 bit A/D converter	0 ~ 10V	0 ~ 20mA / 4~20mA	75mm(L) x 90mm (W) x 70mm(H)
LM3310B-EAI	4 channels, Single-Ended		16 bit A/D converter	0 ~ 100mV 0 ~ 500mV 0 ~ 1V 0 ~ 5V 0 ~ 10V	0 ~ 20mA	75mm(L) x 90mm (W) x 70mm(H)
LM3313-EAI	8 channels, Single-Ended		12 bit A/D converter	-10V to +10V	-20mA ~ +20mA	75mm(L) x 90mm (W) x 70mm(H)
LM3311-EAI	4 channels, Thermocouple		----	J,K,T,N,E,R,S,B thermocouple type, voltage range ± 80 mV	----	75mm(L) x 90mm (W) x 70mm(H)
LM3312-EAI	4 channels, RTD		----	Pt100 (-150 ~ 619.6°C), Pt100 (-150 ~ 157.2°C), Cu50 (-50 ~ 150.1°C), Cu50 (-50 ~ 140.1°C),	----	75mm(L) x 90mm (W) x 70mm(H)
LM3314-EAI	4 channels, NTC		----	R = 10K at 25°C; B value is selectable.	----	75mm(L) x 90mm (W) x 70mm(H)
Analog Output	AO			Output Range (Voltage)	Output Range (Current)	Dimension
LM3320-EAO	2 channels		----	0 ~ 10V	0 ~ 20mA	75mm(L) x 90mm (W) x 70mm(H)
Analog Mix	AI	AO		Input/Output Range (Voltage)	Input/Output Range (Current)	Dimension
LM3330-EAM	4 channels, Single Ended	1 channel	12 bit A/D converter	0 ~ 10V	Input: 0 ~ 20mA / 4 ~ 20 mA Output: 0 ~ 20mA	75mm(L) x 90mm (W) x 70mm(H)

5. The PROFIBUS-DP slave station interface module is used to establish communication with other PLC working in the master mode while the Ethernet Interface module are used to establish communication with computers via the RJ-45 interface.

Communication Modules					
	Description	Interface	Protocol	Baud Rate	Dimension
LM3401-EPFD	PROFIBUS-DP slave station Interface Module	9 pin D type socket or wiring terminal	PROFIBUS-DP (Slave Station)	9.6, 19.2, 45.45, 93.75, 187.5, 500Kbps and 1, 1.5, 3, 6, 12Mbps (auto adaptive)	75mm(L) x 90mm (W) x 70mm(H)
LM3403-EETH	Ethernet Interface Module	Ethernet RJ-45	MODBUS TCP (Slave Station)	10 Mbps	75mm(L) x 90mm (W) x 70mm(H)

Programming Software and Cable	
	Description
LM3800-COM2	RS-232, Programming Cable (2 meters long)
LM3600-PRO2	PowerPro Programming Software CD

Environmental Specifications

Operating Temperature	0°C~55°C
Storage Temperature	-40°C ~ +70°C
Relative Humidity	5%~95% (non condensing)
Drop Test	GB/T2423.7-1995: 50mm, 4 times (without transport packaging)
Free-fall Drop Test	GB/T2423.8-1995: 1m, 5 times (with transport packaging)
Shock Resistance	IEC/EN 60086-2-27 or GB/T2423.5-1995: 15G (147m/S ²) (11ms along 6 axes)
Vibration Resistance	IEC/EN 60086-2-6 or GB/T2423.10-1995: 1G (9.8m/S ²) (resistance to vibration from 10 ~ 150Hz along all 3 axes)
Degree of Protection	IP20
Insulation Resistance	1000VDC, 1min @ 5mA
Environment	Avoid environment containing corrosive gases, Install in a dust-free location

Electromagnetic Compatibility


Electrostatic discharge immunity tests	External Casing	IEC 61000-4-2: Level 2/3, contact discharge 4kV, environment discharge 8kV
Voltage dips, short interruptions and voltage variations immunity test	AC Power	IEC 61000-4-11: Level 3, Polar disruption 0.5 wave
Electrical fast transient / burst immunity test		IEC 61000-4-4: Level 3, 2kV
Surge immunity test		IEC 61000-4-5: Level 2/3, wire to wire 1kV, wire to ground 2kV
Radiated, radio-frequency, electromagnetic field immunity test	I/O signal or Control signal	IEC 61000-4-3: Level 3, 80MHz ~ 1MHz, 10V / m using 1KHz signal 80% modulation
Electrical fast transient/burst immunity test		IEC 61000-4-4: Level 3, 1kV
Immunity to conducted disturbances, induced by radio-frequency fields		IEC 61000-4-6: Level 3, 10V, 0.15 ~ 80MHz, 1KHz and below, 80% amplitude modulation

Maximum I/O Configuration


CPU Modules	Digital Input	Digital Output	Analog Input	Analog Output
LM3104-CDT / LM3105-CAR - Maximum number of expansion = 2				
CPU Based Module I/O	8	6	-	-
Maximum Expandable I/O (If connects 2 expansion module)	16 x 2 = 32	16 x 2 = 32	8x2 = 16	2x2 = 4
Maximum total I/O	8+32 = 40	6+32 = 38	16	4
LM3106-CDT / LM3107-CAR - Maximum number of expansion = 4				
CPU Based Module I/O	14	10	-	-
Maximum Expandable I/O (If connects 4 expansion module)	16x4 = 64	16x4 = 64	8x4 = 32	2x4 = 8
Maximum total I/O	14+64 = 78	10+64 = 74	32	8
LM3108-CDT / LM3109-CAR - Maximum number of expansion = 7				
CPU Based Module I/O	24	16	-	-
Maximum Expandable I/O (If connects 7 expansion module)	16x7 = 112	16x7 = 112	8x7 = 56	2x7 = 14
Maximum total I/O	24+112 = 136	16+112 = 128	56	14
LM3107E-CAR - Maximum number of expansion = 4				
CPU Based Module I/O	12	8	2	1
Maximum Expandable I/O (If connects 4 expansion module)	16x4 = 64	16x4 = 64	8x4 = 32	2x4 = 8
Maximum total I/O	12+64 = 76	8+64 = 72	2+32 = 34	1+8 = 9

LM Micro Series PLC

Connectivity System Architecture

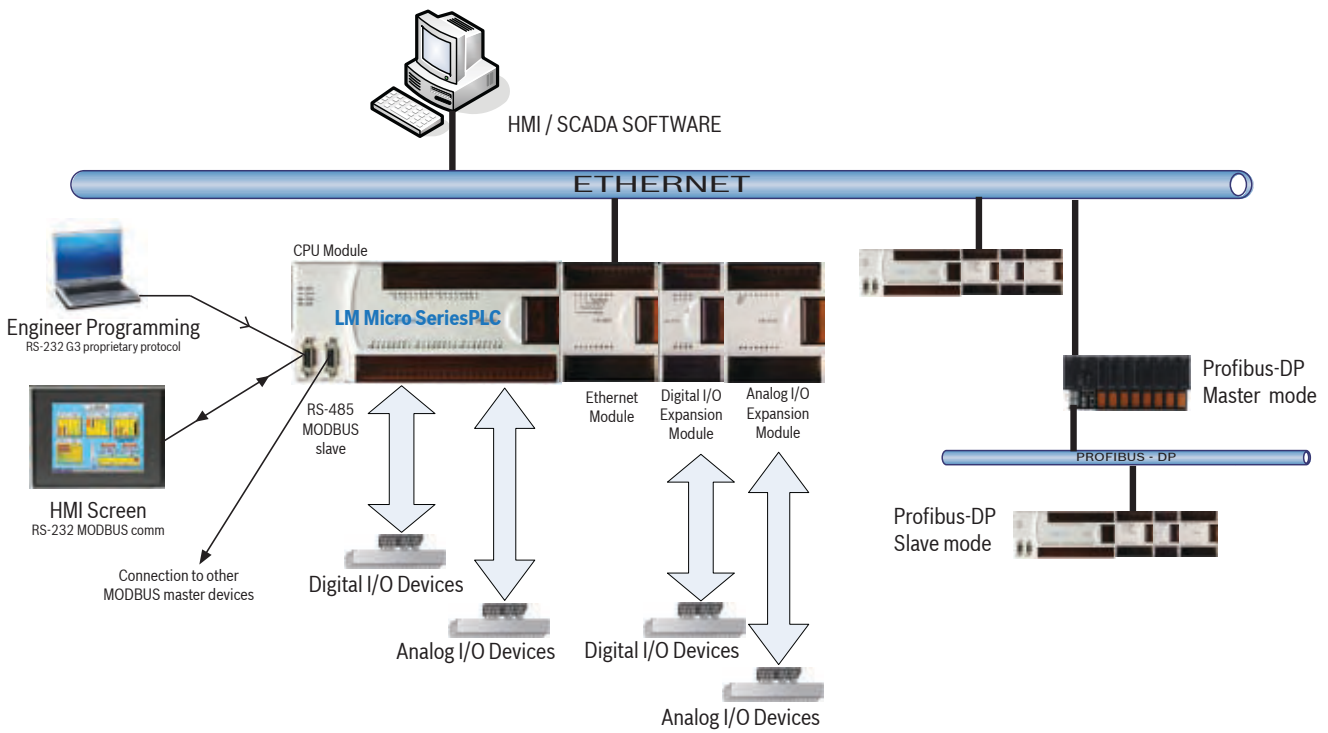

Connections

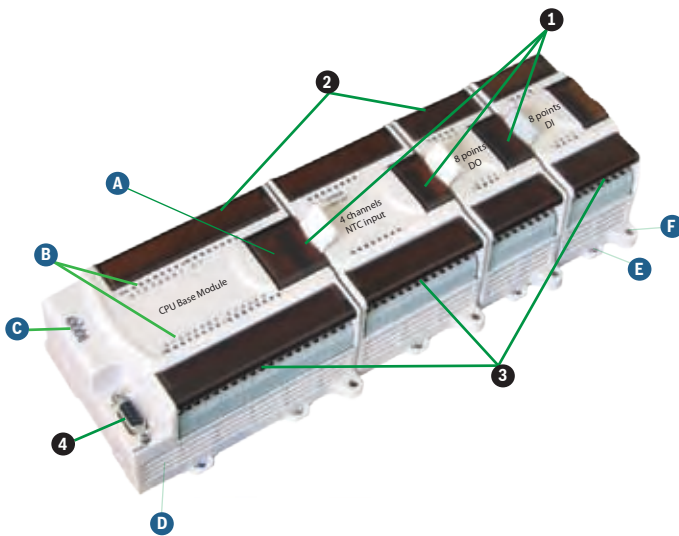

Legends

- 1 Connection to Expansion Modules
- 2 Wiring Terminal for Output + Input Power Supply
- 3 Wiring Terminal for Input + Output Power Supply
- 4 RS-232 / RS-485 Communication Port
- A RUN/STOP operation switch + Analog presets
- B I/O Channels Status Indicator
- C PLC Status Indicator - Run, Stop, Com, Error
- D Heat Radiator
- E DIN Rail Fastener
- F Hole for Backplane or Wall Mounting

PowerPro Programming Software

In complete accordance with IEC61131-3 international programming standard, PowerPro is a comprehensive, Windows-based programming software tool for LM Micro series PLC. It provides an off-line simulation feature that allows programmers simulating, testing and debugging the programming logic before the actual “live” implementation. This makes programming much easier and more convenient since it is not required to connect the PLC and download the programming codes to the hardware devices.



Programming Languages fully comply with IEC61131-3 Industrial Standard

- Supporting 6 types of programming languages editor
 - **Instruction List (IL)**
 - **Structural Text (ST)**
 - **Function Block Diagram (FBD)**
 - **Ladder Diagram (LD)**
 - **Sequence Function Chart (SFC)**
 - **Continuous Function Chart (CFC)**
- Depending on variable requirements, programmers can choose the relevant programming languages to work with. While working with FBD, LD, or IL, programmers are allowed to switch in between these programming languages.

Hundreds of Instructions and Function Blocks

- Over 400 instructions and function blocks to be employed according to variable requirements of user.
- Common instructions include arithmetic, evaluation, Boolean, shift, selection, compare, data type conversion, addressing, call, strings, etc.
- Common function blocks include enhanced PID controller, signal generator, function manipulator, analogue processing, MODBUS, PROFIBUS, Ethernet, real-time clock, analogue potentiometer, watchdog, mono-phase and bi-phase counters, pulse output, etc.

Integrated Simulation

- Debugging of application program without hardware is possible with the build-in simulation feature of PowerPro. The application program can be checked before it is downloaded to the PLC.
- Showing all the variable values declared in the declaration part of each editor.
- All the inputs and outputs can also be simulated.

User Defined libraries

- Customized libraries can be easily created.


CPU MODULES

CPU module contains CPU, I/O, and power supply.


Please review the different product model's specification and features ensuring it can satisfy the requirement of your application. Also, refer to the 'Maximum I/O Configuration' chart in page 7 to determine the maximum possible expansion module you can expand with.

Basic Features

- RUN / STOP sliding switch.
- 2 adjustable analog potentiometer.
- Real-time clock.
- 120K word of program storage memory.
- 6K word of power-loss retain memory zone.
- Sync pulse establishing high-speed data transmission between CPU and expansion modules.
- RS-232 communication/programming port with maximum baud rate of 38400 bps.
- Input power providing 5VDC and 24VDC to all modules.
- Auxiliary 24VDC external output power supply.



CPU MODULES				
	14 points I/O	24 points I/O	40 points I/O	23 points MIX I/O
24V DC Powered	LM3104-CDT 8x DI, 6x DO transistor	LM3106-CDT 14x DI, 10x DO transistor	LM3108-CDT 24x DI, 16x DO transistor	
230V AC Powered	LM3105-CAR 8x DI, 6x DO relay	LM3107-CAR 14x DI, 10x DO relay	LM3109-CAR 24x DI, 16x DO relay	LM3107E-CAR 12x DI, 8x DO relay, 2x AI, 1x AO

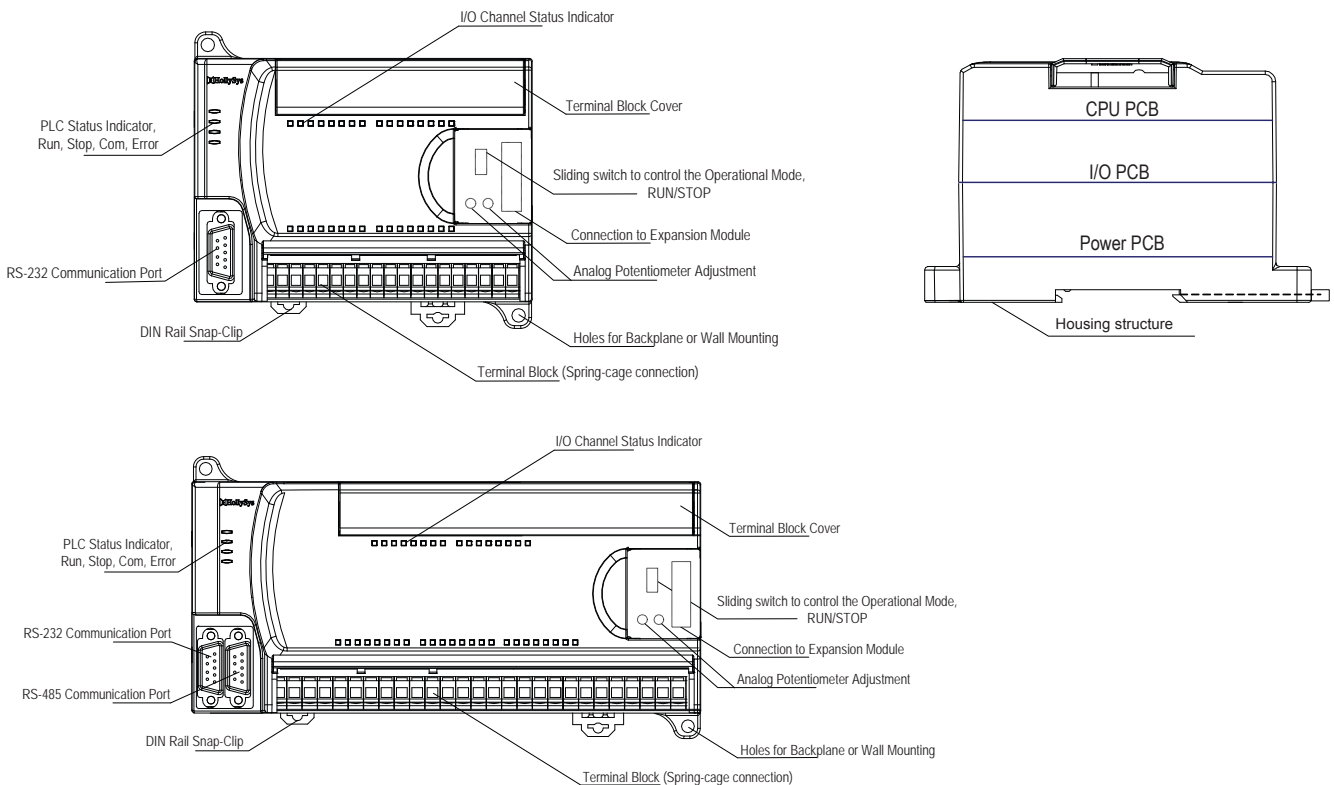

LM3104-CDT CPU MODULE with 14 points I/O (8DI, 6DO), DC Powered

- **8 digital inputs**, (sink/source selectable) of which:
 - 3 of the inputs can be use as 100 KHz high-speed mono-phase counters
 - or 2 of the inputs can be use as 100 KHz high-speed bi-phase counters
 - 2 of the input can be use as pulse catch inputs
 - 2 of the input can be use as interrupt inputs
- **6 digital transistor output**, of which:
 - 1 of the output can be use as 20 KHz high-speed pulse output (PTO or PWM)
- **Expandable with a maximum of 2 additional I/O modules** (Cannot support PROFIBUS-DP and ETHERNET modules)

LM3104-CDT CPU MODULE with 14 points I/O (8DI, 6DO), DC Powered		
Local I/O		
Digital I/O	8 In (24VDC), 6 Out (transistor)	
Analog I/O	None	
Maximum number of expansion modules	2 modules, (communication modules not supported)	
Memory		
User program memory	60,000 words	
Storage type	Flash RAM	
Input storage zone	256 words	
Output storage zone	256 words	
Mid-variables (M) zone	4000 words	
Global (N) zone	12,000 words	
Power-loss retain zone	3,000 words, 10 years	
Instructions		
Instructions	Basic	340
	Expandable	47
Boolean execution speed	0.37 μ s per instruction	
Timer	Unlimited number of timers, 1ms ~ 49 days	
Counter	Unlimited number of counters, 15 bits counting range	
Programming languages	Compliance with IEC61131-3 international standards, supporting 6 programming languages, LD, IL, FBD, SFC, ST, CFC	
Enhanced Features		
High-speed input counter	Mono-phase counters: 3 In (100KHz) Bi-phase counters: 2 In (100KHz)	
Pulse catch input	2	
External interrupt input	2	
Pulse output	1 (20KHz)	
Analog potentiometer adjustment	2 potentiometer adjustment, value range: 0~255	
Real-time clock	Yes, 10 days power loss protection	
Password protection	Yes	
Communications		
Number of comm ports:	1 RS-232 (non-isolated)	
Communication protocol	MODBUS RTU or G3 proprietary or FreePort protocol	
Max. Baud Rate	Up to 38,400 baud	
Power Specifications		
Input power supply	24V DC Power	
Line voltage-permissible range	21 ~ 27 VDC	
Input current (max load)	1.3 A at 24 VDC	
Auxiliary 24 VDC external output power	24V DC Power	
Voltage range	22.8 ~ 25.2 VDC	

LM3104-CDT CPU MODULE with 14 points I/O (8DI, 6DO), DC Powered	
Current limit	
+24 VDC (for expansion bus)	300 mA
+24 VDC (for external)	300 mA
+5 VDC (for expansion bus)	800 mA
Short-circuit protection	400 mA, 24 VDC output
Input Specifications	
Input type	Sink / Source
Number of DC inputs	8
Input voltage	24 VDC
Voltage-permissible range	0 ~ 30 VDC
Logic 1 signal	15 ~ 30 VDC at 3 mA
Logic 0 signal	0 ~ 5 VDC at 1 mA
Optical isolation (galvanic)	500 VAC for 1 minute
Input delay	< 0.6 ms (Rated input voltage)
Isolation group	1 group (8 in)
Output Specifications	
Output type	Transistor, Solid-state MOSFET
Number of DC outputs	6
Output Voltage (rated value)	24 VDC
Permissible range	20.4 ~ 28.8 VDC
Output current logic 1 signal	1 A
Output current logic 0 signal	1 mA
Max. current per common/group	< 4 A
ON state resistance (contact)	< 0.2 Ω
Surge current	< 8 A for 100 ms, max.
Overload protection	No
Optical isolation (galvanic)	500 VAC for 1 minute
Isolation group	2 groups (5 out / 1 out)
Output delay (off to on / on to off)	Normal output < 1ms, High-speed pulse output < 10 μ s
Physical Specifications	
Size of module	125 mm (L) \times 90 mm (W) \times 70 mm (H)
Weight	310 g
Ambient operating environment	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting
Relative humidity	5% ~ 95% non-condensing, no corrosive gas
Storage environment	-40° to +70° C, 25° to 55° C 95% humidity
Mechanical shock	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes
Sinusoidal vibration	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute
Mechanical protection	IP20
Agency approvals	CE approved (EMC and LVD)

* For more details, please refer to the respective terminal block and wiring diagram on page 25 and 26.

LM3105-CAR CPU MODULE with 14 points I/O (8DI, 6DO), AC Powered

- **8 digital inputs**, (sink/source selectable) of which:
 - 3 of the inputs can be use as 100 KHz high-speed mono-phase counters
 - or 2 of the inputs can be use as 100 KHz high-speed bi-phase counters
 - 2 of the input can be use as pulse catch inputs
 - 2 of the input can be use as interrupt inputs
- **6 digital relay output**
- **Expandable with a maximum of 2 additional I/O modules** (Cannot support PROFIBUS-DP and ETHERNET modules)

LM3105-CAR CPU MODULE with 14 points I/O (8DI, 6DO), AC Powered		
Local I/O		
Digital I/O	8 In (24VDC), 6 Out (relay)	
Analog I/O	None	
Maximum number of expansion modules	2 modules, (communication modules not supported)	
Memory		
User program memory	60,000 words	
Storage type	Flash RAM	
Input storage zone	256 words	
Output storage zone	256 words	
Mid-variables (M) zone	4000 words	
Global (N) zone	12,000 words	
Power-loss retain zone	3,000 words, 10 years	
Instructions		
Instructions	Basic	340
	Expandable	47
Boolean execution speed	0.37µs per instruction	
Timer	Unlimited number of timers, 1ms ~ 49 days	
Counter	Unlimited number of counters, 15 bits counting range	
Programming languages	Compliance with IEC61131-3 international standards, supporting 6 programming languages, LD, IL, FBD, SFC, ST, CFC	
Enhanced Features		
High-speed input counter	Mono-phase counters: 3 In (100KHz) Bi-phase counters: 2 In (100KHz)	
Pulse catch input	2	
External interrupt input	2	
Pulse output	None	
Analog potentiometer adjustment	2 potentiometer adjustment, value range: 0~255	
Real-time clock	Yes, 10 days power loss protection	
Password protection	Yes	
Communications		
Number of comm ports:	1 RS-232 (non-isolated)	
Communication protocol	MODBUS RTU or G3 proprietary or FreePort protocol	
Max. Baud Rate	Up to 38,400 baud	
Power Specifications		
Input power supply		
Line voltage-permissible range	187 ~ 242 VAC, 47 ~ 63 Hz	
Input current (max load)	120 mA	
Auxillary 24 VDC external output power		
Voltage range	22.8 ~ 25.2 VDC	

LM3105-CAR CPU MODULE with 14 points I/O (8DI, 6DO), AC Powered

Current limit	
+24 VDC (for expansion bus)	260 mA
+24 VDC (for external)	200 mA
+5 VDC(for expansion bus)	800 mA
Short-circuit protection	400 mA, 24 VDC output
Input Specifications	
Input type	Sink / Source
Number of DC inputs	8
Input voltage	24 VDC
Voltage-permissible range	0 ~ 30 VDC
Logic 1 signal	15 ~ 30 VDC at 3 mA
Logic 0 signal	0 ~ 5 VDC at 1 mA
Optical isolation (galvanic)	500 VAC for 1 minute
Input delay	< 0.6 ms (Rated input voltage)
Isolation group	1 group (8 in)
Output Specifications	
Output type	Relay, dry contact
Number of relay outputs	6
Permissible range	5 ~ 30 VDC or 5 ~ 250 VAC
Output current logic 1 signal	1 A
Output current logic 0 signal	1 mA
Max. current per common/group	< 10 A
ON state resistance (contact)	< 0.2 Ω
Isolation	
Isolation resistance	100 M Ω (minimum)
Isolation coil to contact	3000 VAC for 1 minute
Isolation between open contacts	750 VAC for 1 minute
Isolation group	2 groups (2 out / 4 out)
Pulse train output frequency	1 Hz (maximum)
Relay lifespan	
Switching delay	< 10ms (maximum)
Lifetime mechanical (no load)	10,000,000 times, open / close
Lifetime contacts at rated load	100,000 times, open / close
Physical Specifications	
Size of module	125 mm (L) × 90 mm (W) × 70 mm (H)
Weight	350 g
Ambient operating environment	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting
Relative humidity	5% ~ 95% non-condensing, no corrosive gas
Storage environment	-40° to +70° C, 25° to 55° C 95% humidity
Mechanical shock	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes
Sinusoidal vibration	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute
Mechanical protection	IP20
Agency approvals	CE approved (EMC and LVD)

* For more details, please refer to the respective terminal block and wiring diagram on page 25 and 26.

LM3106-CDT CPU MODULE with 24 points I/O (14DI, 10DO), DC Powered

- **14 digital inputs**, (sink/source selectable) of which:
 - 3 of the inputs can be use as 100 KHz high-speed mono-phase counters
 - or 2 of the inputs can be use as 100 KHz high-speed bi-phase counters
 - 4 of the input can be use as pulse catch inputs
 - 4 of the input can be use as interrupt inputs
- **10 digital transistor output**, of which:
 - 2 of the output can be use as 20 KHz high-speed pulse output (PTO or PWM)
- **Expandable with a maximum of 4 additional modules**

LM3106-CDT CPU MODULE with 24 points I/O (14DI, 10DO), DC Powered		
Local I/O		
Digital I/O	14 In (24VDC), 10 Out (transistor)	
Analog I/O	None	
Maximum number of expansion modules	4 modules	
Memory		
User program memory	60,000 words	
Storage type	Flash RAM	
Input storage zone	256 words	
Output storage zone	256 words	
Mid-variables (M) zone	4000 words	
Global (N) zone	12,000 words	
Power-loss retain zone	3,000 words, 10 years	
Instructions		
Instructions	Basic	340
	Expandable	47
Boolean execution speed	0.37µs per instruction	
Timer	Unlimited number of timers, 1ms ~ 49 days	
Counter	Unlimited number of counters, 15 bits counting range	
Programming languages	Compliance with IEC61131-3 international standards, supporting 6 programming languages, LD, IL, FBD, SFC, ST, CFC	
Enhanced Features		
High-speed input counter	Mono-phase counters: 3 In (100KHz) Bi-phase counters: 2 In (100KHz)	
Pulse catch input	4	
External interrupt input	4	
Pulse output	2 (20KHz)	
Analog potentiometer adjustment	2 potentiometer adjustment, value range: 0~255	
Real-time clock	Yes, 10 days power loss protection	
Password protection	Yes	
Communications		
Number of comm ports:	1 RS-232 (non-isolated)	
Communication protocol	MODBUS RTU or G3 proprietary or FreePort protocol	
Max. Baud Rate	Up to 38,400 baud	
Power Specifications		
Input power supply	24V DC Power	
Line voltage-permissible range	21 ~ 27 VDC	
Input current (max load)	1.3 A at 24 VDC	
Auxiliary 24 VDC external output power	24V DC Power	
Voltage range	22.8 ~ 25.2 VDC	

LM3106-CAR CPU MODULE with 24 points I/O (14DI, 10DO), DC Powered

Current limit	
+24 VDC (for expansion bus)	300 mA
+24 VDC (for external)	300 mA
+5 VDC (for expansion bus)	800 mA
Short-circuit protection	400 mA, 24 VDC output
Input Specifications	
Input type	Sink / Source
Number of DC inputs	14
Input voltage	24 VDC
Voltage-permissible range	0 ~ 30 VDC
Logic 1 signal	15 ~ 30 VDC at 3 mA
Logic 0 signal	0 ~ 5 VDC at 1 mA
Optical isolation (galvanic)	500 VAC for 1 minute
Input delay	< 0.6 ms (Rated input voltage)
Isolation group	2 groups (8 in/ 6 in)
Output Specifications	
Output type	Transistor, Solid-state MOSFET
Number of DC outputs	10
Permissible range	20.4 ~ 28.8 VDC
Rated value	24 VDC
Output current logic 1 signal	1 A
Output current logic 0 signal	1 mA
Max. current per common/group	< 4 A
ON state resistance (contact)	< 0.2 Ω
Surge current	< 8 A for 100 ms, max.
Overload protection	No
Optical isolation (galvanic)	500 VAC for 1 minute
Isolation group	2 groups (5 out / 5 out)
Output delay (off to on / on to off)	Normal output < 1ms, High-speed pulse output < 10 μ s
Physical Specifications	
Size of module	125 mm (L) \times 90 mm (W) \times 70 mm (H)
Weight	310 g
Ambient operating environment	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting
Relative humidity	5% ~ 95% non-condensing, no corrosive gas
Storage environment	-40° to +70° C, 25° to 55° C 95% humidity
Mechanical shock	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes
Sinusoidal vibration	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute
Mechanical protection	IP20
Agency approvals	CE approved (EMC and LVD)

**For more details, please refer to the respective terminal block and wiring diagram on page 25 and 26.*

LM3107-CAR CPU MODULE with 24 points I/O (14DI, 10DO), AC Powered

- **14 digital inputs**, (sink/source selectable) of which:
 - 3 of the inputs can be use as 100 KHz high-speed mono-phase counters
 - or 2 of the inputs can be use as 100 KHz high-speed bi-phase counters
 - 4 of the input can be use as pulse catch inputs
 - 4 of the input can be use as interrupt inputs
- **10 digital relay output**
- **Expandable with a maximum of 4 additional modules**

LM3107-CAR CPU MODULE with 24 points I/O (14DI, 10DO), AC Powered		
Local I/O		
Digital I/O	14 In (24VDC), 10 Out (relay)	
Analog I/O	None	
Maximum number of expansion modules	4 modules	
Memory		
User program memory	60,000 words	
Storage type	Flash RAM	
Input storage zone	256 words	
Output storage zone	256 words	
Mid-variables (M) zone	4000 words	
Global (N) zone	12,000 words	
Power-loss retain zone	3,000 words, 10 years	
Instructions		
Instructions	Basic	340
	Expandable	47
Boolean execution speed	0.37µs per instruction	
Timer	Unlimited number of timers, 1ms ~ 49 days	
Counter	Unlimited number of counters, 15 bits counting range	
Programming languages	Compliance with IEC61131-3 international standards, supporting 6 programming languages, LD, IL, FBD, SFC, ST, CFC	
Enhanced Features		
High-speed input counter	Mono-phase counters: 3 In (100KHz) Bi-phase counters: 2 In (100KHz)	
Pulse catch input	4	
External interrupt input	4	
Pulse output	None	
Analog potentiometer adjustment	2 potentiometer adjustment, value range: 0~255	
Real-time clock	Yes, 10 days power loss protection	
Password protection	Yes	
Communications		
Number of comm ports:	1 RS-232 (non-isolated)	
Communication protocol	MODBUS RTU or G3 proprietary or FreePort protocol	
Max. Baud Rate	Up to 38,400 baud	
Power Specifications		
Input power supply		
Line voltage-permissible range	187 ~ 242 VAC, 47 ~ 63 Hz	
Input current (max load)	120 mA	
Auxiliary 24 VDC external output power		
Voltage range	22.8 ~ 25.2 VDC	

LM3107-CAR CPU MODULE with 24 points I/O (14DI, 10DO), AC Powered

Current limit	
+24 VDC (for expansion bus)	260 mA
+24 VDC (for external)	200 mA
+5 VDC (for expansion bus)	800 mA
Short-circuit protection	400 mA, 24 VDC output
Input Specifications	
Input type	Sink / Source
Number of DC inputs	14
Input voltage	24 VDC
Voltage-permissible range	0 ~ 30 VDC
Logic 1 signal	15 ~ 30 VDC at 3 mA
Logic 0 signal	0 ~ 5 VDC at 1 mA
Optical isolation (galvanic)	500 VAC for 1 minute
Input delay	< 0.6 ms (Rated input voltage)
Isolation group	2 groups (8 in / 6 in)
Output Specifications	
Output type	Relay, dry contact
Number of relay outputs	10
Permissible range	5 ~ 30 VDC or 5 ~ 250 VAC
Output current logic 1 signal	2 A
Output current logic 0 signal	0 A
Max. current per common/group	< 10 A
ON state resistance (contact)	< 0.2 Ω
Isolation	
Isolation resistance	100 M Ω (minimum)
Isolation coil to contact	3000 VAC for 1 minute
Isolation between open contacts	750 VAC for 1 minute
Isolation group	3 groups (4 out / 4 out / 2 out)
Pulse train output frequency	1 Hz (maximum)
Relay lifespan	
Switching delay	< 10ms (maximum)
Lifetime mechanical (no load)	10,000,000 times, open / close
Lifetime contacts at rated load	100,000 times, open / close
Physical Specifications	
Size of module	125 mm (L) × 90 mm (W) × 70 mm (H)
Weight	380 g
Ambient operating environment	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting
Relative humidity	5% ~ 95% non-condensing, no corrosive gas
Storage environment	-40° to +70° C, 25° to 55° C 95% humidity
Mechanical shock	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes
Sinusoidal vibration	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute
Mechanical protection	IP20
Agency approvals	CE approved (EMC and LVD)

* For more details, please refer to the respective terminal block and wiring diagram on page 25 and 26.

LM3107E-CAR CPU MODULE with 23 points MIX I/O (12DI, 8DO, 2AI, 1AO), AC Powered

- **12 digital inputs**, (sink/source selectable) of which:
 - 3 of the inputs can be use as 100 KHz high-speed mono-phase counters
 - or 2 of the inputs can be use as 100 KHz high-speed bi-phase counters
 - 4 of the input can be use as pulse catch inputs
 - 4 of the input can be use as interrupt inputs
- **8 digital relay output**
- **2 analog inputs (voltage/current)**
- **1 analog outputs**
- **Expandable with a maximum of 5 additional I/O or communication modules**

LM3107E-CAR CPU MODULE with 23 points Mix I/O (12DI, 8DO, 2AI, 1AO), AC Powered

Local I/O		
Digital I/O	12 In (24VDC), 8 Out (relay)	
Analog I/O	2 In, 1 Out	
Maximum number of expansion modules	4 modules	
Memory		
User program memory	60,000 words	
Storage type	Flash RAM	
Input storage zone	256 words	
Output storage zone	256 words	
Mid-variables (M) zone	4000 words	
Global (N) zone	12,000 words	
Power-loss retain zone	3,000 words, 10 years	
Instructions		
Instructions	Basic	340
	Expandable	47
Boolean execution speed	0.37 μ s per instruction	
Timer	Unlimited number of timers, 1ms ~ 49 days	
Counter	Unlimited number of counters, 15 bits counting range	
Programming languages	Compliance with IEC61131-3 international standards, supporting 6 programming languages, LD, IL, FBD, SFC, ST, CFC	
Enhanced Features		
High-speed input counter	Mono-phase counters: 3 In (100KHz) Bi-phase counters: 2 In (100KHz)	
Pulse catch input	4	
External interrupt input	4	
Pulse output	None	
Analog potentiometer adjustment	2 potentiometer adjustment, value range: 0~255	
Real-time clock	Yes, 10 days power loss protection	
Password protection	Yes	
Communications		
Number of comm ports:	1 RS-232 (non-isolated)	
Communication protocol	MODBUS RTU or G3 proprietary or FreePort protocol	
Max. Baud Rate	Up to 38,400 baud	
Power Specifications		
Input power supply		
Line voltage-permissible range	85 ~ 264 VAC, 47 ~ 63 Hz	
Input current (max load)	120 mA	

LM3107E-CAR CPU MODULE with 23 points Mix I/O (12DI, 8DO, 2AI, 1AO), AC Powered

Auxillary 24 VDC external output power	24V DC Power	
Voltage range	22.8 ~ 25.2 VDC	
Current limit		
+24 VDC (for expansion bus)	260 mA	
+24 VDC (for external)	200 mA	
+5 VDC(for expansion bus)	800 mA	
Short-circuit protection	400 mA, 24 VDC output	
Digital Input Specifications		
Input type	Sink / Source	
Number of DC inputs	12	
Input voltage	24 VDC	
Voltage-permissible range	0 ~ 30 VDC	
Logic 1 signal	15 ~ 30 VDC at 3 mA	
Logic 0 signal	0 ~ 5 VDC at 1 mA	
Optical isolation (galvanic)	1000 VAC for 1 minute	
Input delay	< 0.6 ms (Rated input voltage)	
Isolation group	2 groups (8 in / 4 in)	
Digital Output Specifications		
Output type	Relay, dry contact	
Number of relay outputs	8	
Permissible range	5 ~ 30 VDC or 5 ~ 250 VAC	
Output current logic 1 signal	2 A	
Output current logic 0 signal	0 A	
Max. current per common/group	< 10 A	
ON state resistance (contact)	< 0.2 Ω	
Isolation		
Isolation coil to contact	3000 VAC for 1 minute, 1 mA	
Isolation between open contacts	750 VAC for 1 minute, 1 mA	
Isolation group	2 groups (4 out / 4 out)	
Relay lifespan		
Switching delay	< 10ms (maximum)	
Lifetime mechanical (no load)	10,000,000 times, open / close	
Lifetime contacts at 2A rated load	100,000 times, open / close	
Analog Input Specifications		
Number of analog input	2 channels	
Input range	Voltage	0 to 10 V
	Current	0 ~ 20 mA
Accuracy, typical 25° C (unipolar)	$\pm 1\%$ of full-scale	
Data word format	0 ~ 10,000	
Input impedance	1 M Ω (Voltage), 250 Ω (Current)	
Maximum input voltage	30 VDC	
Maximum input current	30 mA	
Isolation (field side to logic)	None	
Sampling refresh time (Analog input step response)	< 20ms every 2 channel (does not include scanning time)	

...continued on next page...

LM3107E-CAR CPU MODULE with 23 points Mix I/O (12DI, 8DO, 2AI, 1AO), AC Powered

Analog Output Specifications

Number of analog output		1 channel
Output Range	Voltage output	0 ~ 10V
	Current output	0 ~ 20 mA
Accuracy, typical 25° C		±1% of full-scale
Data word format		0 ~ 4095
Settling time	Voltage output	≤ 2 ms
	Current output	≤ 2 ms
Maximum drive	Voltage output	2000 Ω (minimum)
	Current output	600 Ω (maximum)
Isolation (field side to logic)		None
Output refresh time		1 scan cycle

Physical Specifications

Size of module	125 mm (L) × 90 mm (W) × 70 mm (H)
Weight	380 g
Ambient operating environment	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting
Relative humidity	5% ~ 95% non-condensing, no corrosive gas
Storage environment	-40° to +70° C, 25° to 55° C 95% humidity
Mechanical shock	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes
Sinusoidal vibration	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute
Mechanical protection	IP20
Agency approvals	CE approved (EMC and LVD)

** For more details, please refer to the respective terminal block and wiring diagram on page 25 and 26.*

LM3108-CDT CPU MODULE with 40 points I/O (24DI, 16DO), DC Powered

- **24 digital inputs**, (sink/source selectable) of which:
 - 3 of the inputs can be use as 100 KHz high-speed mono-phase counters or 2 of the inputs can be use as 100 KHz high-speed bi-phase counters.
 - 4 of the input can be use as pulse catch inputs.
 - 4 of the input can be use as interrupt inputs.
- **16 digital transistor output**, of which:
 - 2 of the output can be use as 20 KHz high-speed pulse output (PTO or PWM).
- **Expandable with a maximum of 7 additional I/O or communication modules.**
- **Additional 1x RS-485 port for communication with local devices.**

LM3108-CDT CPU MODULE with 40 points I/O (24DI, 16DO), DC Powered		
Local I/O		
Digital I/O	24 In (24VDC), 16 Out (transistor)	
Analog I/O	None	
Maximum number of expansion modules	7 modules	
Memory		
User program memory	60,000 words	
Storage type	Flash RAM	
Input storage zone	256 words	
Output storage zone	256 words	
Mid-variables (M) zone	4000 words	
Global (N) zone	12,000 words	
Power-loss retain zone	3,000 words, 10 years	
Instructions		
Instructions	Basic	340
	Expandable	47
Boolean execution speed	0.37 μ s per instruction	
Timer	Unlimited number of timers, 1ms ~ 49 days	
Counter	Unlimited number of counters, 15 bits counting range	
Programming languages	Compliance with IEC61131-3 international standards, supporting 6 programming languages, LD, IL, FBD, SFC, ST, CFC	
Enhanced Features		
High-speed input counter	Mono-phase counters: 3 In (100KHz) Bi-phase counters: 2 In (100KHz)	
Pulse catch input	4	
External interrupt input	4	
Pulse output	2 (20KHz)	
Analog potentiometer adjustment	2 potentiometer adjustment, value range: 0~255	
Real-time clock	Yes, 10 days power loss protection	
Password protection	Yes	
Communications		
Number of comm ports:	1 RS-232 and 1 RS-485 comm. port (non-isolation)	
Communication protocol	MODBUS RTU or G3 proprietary or FreePort protocol	
Max. Baud Rate	Up to 38,400 baud	
Power Specifications		
Input power supply	24V DC Power	
Line voltage-permissible range	21 ~ 27 VDC	
Input current (max load)	1.5 A at 24 VDC	
Auxillary 24 VDC external output power	24V DC Power	
Voltage range	22.8 ~ 25.2 VDC	

LM3108-CDT CPU MODULE with 40 points I/O (24DI, 16DO), DC Powered

Current limit	
+24 VDC (for expansion bus)	400 mA
+24 VDC (for external)	400 mA
+5 VDC (for expansion bus)	1500 mA
Short-circuit protection	900 mA, 24 VDC output
Input Specifications	
Input type	Sink / Source
Number of DC inputs	24
Input voltage	24 VDC
Voltage-permissible range	0 ~ 30 VDC
Logic 1 signal	15 ~ 30 VDC at 3 mA
Logic 0 signal	0 ~ 5 VDC at 1 mA
Optical isolation (galvanic)	500 VAC for 1 minute
Input delay	< 0.6 ms (Rated input voltage)
Isolation group	3 groups (8 in / 8 in / 8 in)
Output Specifications	
Output type	Transistor, Solid-state MOSFET
Number of DC outputs	16
Permissible range	20.4 ~ 28.8 VDC
Rated value	24 VDC
Output current logic 1 signal	1 A
Output current logic 0 signal	1 mA
Max. current per common/group	< 4 A
ON state resistance (contact)	< 0.2 Ω
Surge current	< 8 A for 100 ms, max.
Overload protection	No
Optical isolation (galvanic)	500 VAC for 1 minute
Isolation group	2 groups (8 out / 8 out)
Output delay (off to on / on to off)	Normal output < 1ms, High-speed pulse output < 10 μ s
Physical Specifications	
Size of module	200 mm (L) \times 90 mm (W) \times 70 mm (H)
Weight	470 g
Ambient operating environment	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting
Relative humidity	5% ~ 95% non-condensing, no corrosive gas
Storage environment	-40° to +70° C, 25° to 55° C 95% humidity
Mechanical shock	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes
Sinusoidal vibration	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute
Mechanical protection	IP20
Agency approvals	CE approved (EMC and LVD)

** For more details, please refer to the respective terminal block and wiring diagram on page 25 and 26.*

LM3109-CAR CPU MODULE with 40 points I/O (24DI, 16DO), AC Powered

- **24 digital inputs**, (sink/source selectable) of which:
 - 3 of the inputs can be use as 100 KHz high-speed mono-phase counters or 2 of the inputs can be use as 100 KHz high-speed bi-phase counters.
 - 4 of the input can be use as pulse catch inputs.
 - 4 of the input can be use as interrupt inputs.
- **16 digital transistor output**
- **Expandable with a maximum of 7 additional I/O or communication modules.**
- **Additional 1x RS-485 port for communication with local devices.**


LM3109-CAR CPU MODULE with 40 points I/O (24DI, 16DO), AC Powered		
Local I/O		
Digital I/O	24 In (24VDC), 16 Out (relay)	
Analog I/O	None	
Maximum number of expansion modules	7 modules	
Memory		
User program memory	60,000 words	
Storage type	Flash RAM	
Input storage zone	256 words	
Output storage zone	256 words	
Mid-variables (M) zone	4000 words	
Global (N) zone	12,000 words	
Power-loss retain zone	3,000 words, 10 years	
Instructions		
Instructions	Basic	340
	Expandable	47
Boolean execution speed	0.37 μ s per instruction	
Timer	Unlimited number of timers, 1ms ~ 49 days	
Counter	Unlimited number of counters, 15 bits counting range	
Programming languages	Compliance with IEC61131-3 international standards, supporting 6 programming languages, LD, IL, FBD, SFC, ST, CFC	
Enhanced Features		
High-speed input counter	Mono-phase counters: 3 In (100KHz) Bi-phase counters: 2 In (100KHz)	
Pulse catch input	4	
External interrupt input	4	
Pulse output	None	
Analog potentiometer adjustment	2 potentiometer adjustment, value range: 0~255	
Real-time clock	Yes, 10 days power loss protection	
Password protection	Yes	
Communications		
Number of comm ports:	1 RS-232 and 1 RS-485 comm. port (non-isolation)	
Communication protocol	MODBUS RTU or G3 proprietary or FreePort protocol	
Max. Baud Rate	Up to 38,400 baud	
Power Specifications		
Input power supply		
Line voltage-permissible range	187 ~ 242 VAC, 47 ~ 63 Hz	
Input current (max load)	200 mA	
Auxillary 24 VDC external output power		
Voltage range	22.8 ~ 25.2 VDC	

LM3109-CAR CPU MODULE with 40 points I/O (24DI, 16DO), AC Powered


Current limit	
+24 VDC (for expansion bus)	320 mA
+24 VDC (for external)	400 mA
+5 VDC (for expansion bus)	1300 mA
Short-circuit protection	900 mA, 24 VDC output
Input Specifications	
Input type	Sink / Source
Number of DC inputs	24
Input voltage	24 VDC
Voltage-permissible range	0 ~ 30 VDC
Logic 1 signal	15 VDC at 3 mA (minimum)
Logic 0 signal	5 VDC at 1 mA (maximum)
Optical isolation (galvanic)	500 VAC for 1 minute
Input delay	< 0.6 ms (Rated input voltage)
Isolation group	3 groups (8 in / 8 in / 8 in)
Output Specifications	
Output type	Relay, dry contact
Number of relay outputs	16
Permissible range	5 ~ 30 VDC or 5 ~ 250 VAC
Output current logic 1 signal	2 A
Output current logic 0 signal	0 A
Max. current per common/group	< 10 A
ON state resistance (contact)	< 0.2 Ω
Isolation	
Isolation resistance	100 M Ω (minimum)
Isolation coil to contact	3000 VAC for 1 minute
Isolation between open contacts	750 VAC for 1 minute
Isolation group	4 groups (4 out / 4 out / 4 out / 4 out)
Pulse train output frequency	1 Hz (maximum)
Relay lifespan	
Switching delay	< 10ms (maximum)
Lifetime mechanical (no load)	10,000,000 times, open / close
Lifetime contacts at rated load	100,000 times, open / close
Physical Specifications	
Size of module	200 mm (L) × 90 mm (W) × 70 mm (H)
Weight	550 g
Ambient operating environment	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting
Relative humidity	5% ~ 95% non-condensing, no corrosive gas
Storage environment	-40° to +70° C, 25° to 55° C 95% humidity
Mechanical shock	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes
Sinusoidal vibration	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute
Mechanical protection	IP20
Agency approvals	CE approved (EMC and LVD)

* For more details, please refer to the respective terminal block and wiring diagram on page 25 and 26.


Terminal block and wiring diagram for CPU Modules

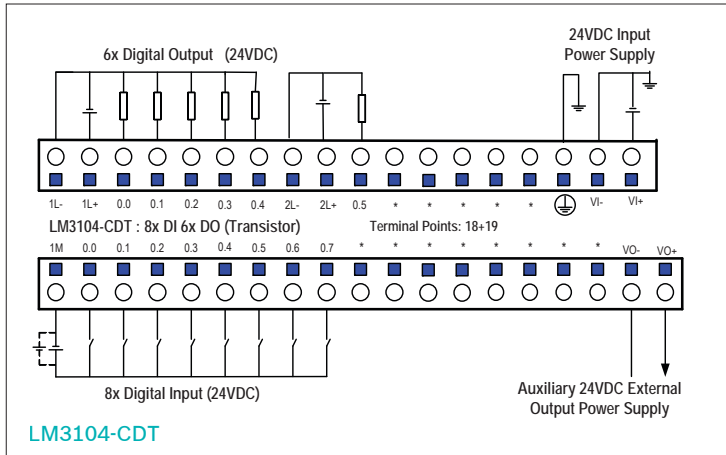


Top Terminal Block	Top Terminal Description	Bottom Terminal Block	Bottom Terminal Description
1L-	DO load drive supply -24VDC GND terminal	1M	Common terminal of DI (connect to 24VDC +/- terminal corresponding to source/sink DI)
1L+	DO load drive supply +24VDC terminal	IO.0	Digital input #0 / high-speed input counter
Q0.0	Digital output #0	IO.1	Digital input #1 / high-speed input counter control
Q0.1	Digital output #1	IO.2	Digital input #2 / high-speed input counter
Q0.2	Digital output #2	IO.3	Digital input #3 / high-speed input counter control
Q0.3	Digital output #3 / High-speed pulse output	IO.4	Digital input #4
Q0.4	Digital output #4	IO.5	Digital input #5
2L-	DO load drive supply -24VDC GND terminal	IO.6	Digital input #0 / high-speed input counter / external interrupt input / pulse catch input
2L+	DO load drive supply +24VDC terminal	IO.7	Digital input #0 / external interrupt input / pulse catch input
Q0.5	Digital output #5	*	Not in used
*	Not in used	VO-	Auxiliary -24VDC GND terminal
⊕	EARTH GROUND	VO+	Auxiliary +24VDC power supply terminal
VI-	-24VDC power supply GND terminal		
VI+	+24VDC power supply terminal		

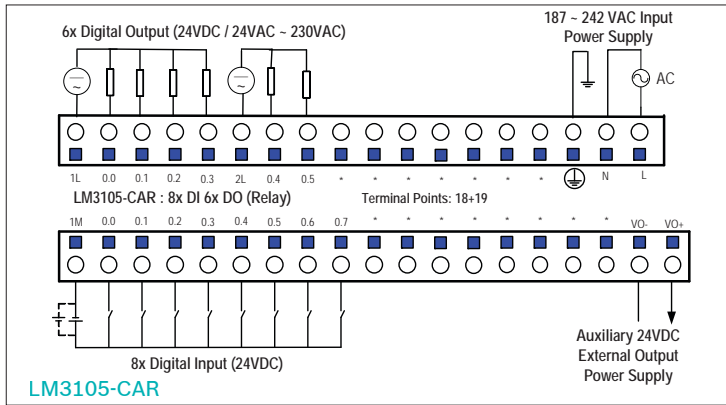

Top Terminal Block	Top Terminal Description	Bottom Terminal Block	Bottom Terminal Description
1L	DO common terminal group #1 (24VDC or 230VAC supply)	1M	DI common terminal (connect to 24VDC +/- terminal corresponding to source/sink DI)
Q0.0	Digital output #0	IO.0	Digital input #0 / high-speed input counter
Q0.1	Digital output #1	IO.1	Digital input #1 / high-speed input counter control
Q0.2	Digital output #2	IO.2	Digital input #2 / high-speed input counter
Q0.3	Digital output #3 / high-speed pulse output	IO.3	Digital input #3 / high-speed input counter control
2L	DO common terminal group #2 (24VDC or 230VAC supply)	IO.4	Digital input #4
Q0.4	Digital output #4	IO.5	Digital input #5
Q0.5	Digital output #5	IO.6	Digital input #0 / high-speed input counter / external interrupt input / pulse catch input
*	Not in used	IO.7	Digital Input #0 / external interrupt input / pulse catch input
⊕	EARTH GROUND	*	Not in used
N	230VAC Neutral	VO-	Auxiliary -24VDC GND terminal
L	230VAC Live	VO+	Auxiliary +24VDC power supply terminal

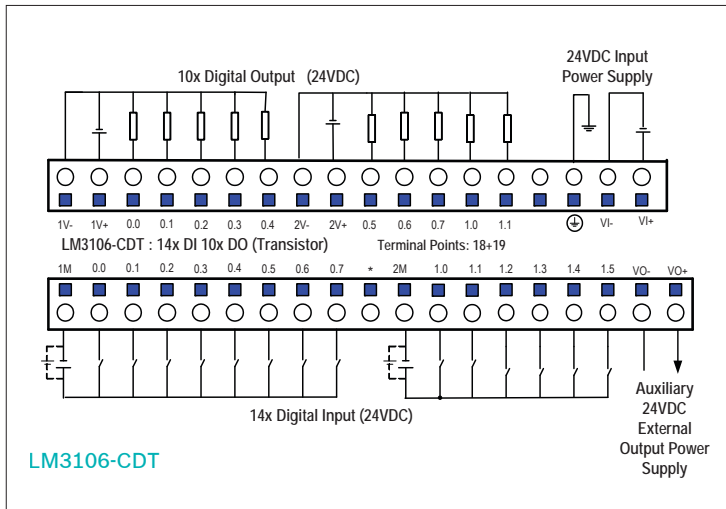


Top Terminal Block	Top Terminal Description	Bottom Terminal Block	Bottom Terminal Description
1V-	DO load drive supply -24VDC GND terminal	1M	DI common terminal of group #1 (connect to 24VDC +/- terminal corresponding to source/sink DI)
1V+	DO load drive supply +24VDC terminal	IO.0	Digital input #0 / high-speed input counter
Q0.0	Digital output #0	IO.1	Digital input #1 / high-speed input counter control
Q0.1	Digital output #1	IO.2	Digital input #2 / high-speed input counter
Q0.2	Digital output #2	IO.3	Digital input #3 / high-speed input counter control
Q0.3	Digital output #3 / high-speed pulse output	IO.4	Digital input #4
Q0.4	Digital output #4	IO.5	Digital input #5
2V-	DO load drive supply -24VDC GND terminal	IO.6	Digital input #6 / high-speed input counter / external interrupt input / pulse catch input
2V+	DO load drive supply +24VDC terminal	IO.7	Digital input #7 / external interrupt input / pulse catch input
Q0.5	Digital output #5	*	Not in used
Q0.6	Digital output #6	2M	DI common terminal of group #2 (connect to 24VDC +/- terminal corresponding to source/sink DI)
Q0.7	Digital output #7	IO.8	Digital Input #8 / external interrupt input / pulse catch input
Q1.0	Digital output #8	IO.9	Digital Input #9 / external interrupt input / pulse catch input
Q1.1	Digital output #9 / high-speed pulse output	IO.10	Digital Input #10
⊕	EARTH GROUND	IO.11	Digital Input #11
VI-	-24VDC power supply GND terminal	IO.12	Digital Input #12
VI+	+24VDC power supply terminal	IO.13	Digital Input #13
		VO-	Auxiliary -24VDC GND terminal
		VO+	Auxiliary +24VDC power supply terminal

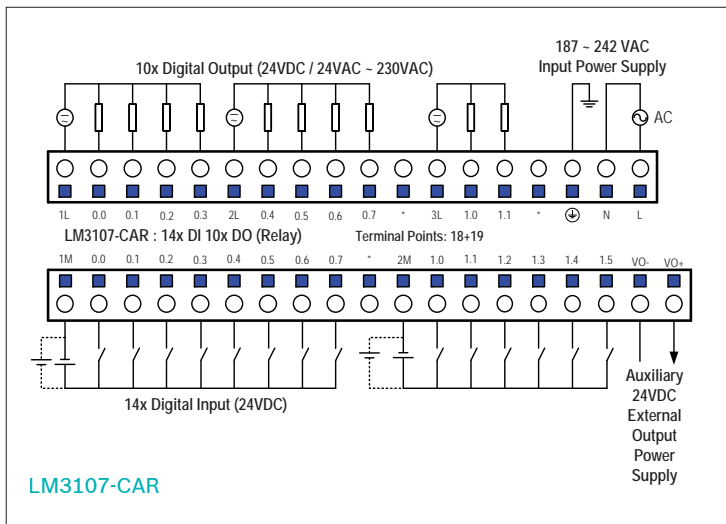


Top Terminal Block	Top Terminal Description	Bottom Terminal Block	Bottom Terminal Description
1L	DO common terminal of group #1 (24VDC or 230VAC supply)	1M	DI common terminal of group #1 (connect to 24VDC +/- terminal corresponding to source/sink DI)
Q0.0	Digital output #0	IO.0	Digital input #0 / high-speed input counter
Q0.1	Digital output #1	IO.1	Digital input #1 / high-speed input counter control
Q0.2	Digital output #2	IO.2	Digital input #2 / high-speed input counter
Q0.3	Digital output #3	IO.3	Digital input #3 / high-speed input counter control
2L	DO common terminal of group #2 (24VDC or 230VAC supply)	IO.4	Digital input #4
Q0.4	Digital output #4	IO.5	Digital input #5
Q0.5	Digital output #5	IO.6	Digital input #6 / high-speed input counter / external interrupt input / pulse catch input
Q0.6	Digital output #6	IO.7	Digital Input #7 / external interrupt input / pulse catch input
Q0.7	Digital output #7	*	Not in used
*	Not in used	2M	DI common terminal of group #2 (connect to 24VDC +/- terminal corresponding to source/sink DI)
3L	DO common terminal of group #3 (24VDC or 230VAC supply)	IO.8	Digital Input #8 / external interrupt input / pulse catch input
Q1.0	Digital output #8	IO.9	Digital Input #9 / external interrupt input / pulse catch input
Q1.1	Digital output #9	IO.10	Digital Input #10
*	Not in used	IO.11	Digital Input #11
⊕	EARTH GROUND	IO.12	Digital Input #12
N	230VAC Neutral	IO.13	Digital Input #13
L	234VAC Live	VO-	Auxiliary -24VDC GND terminal
		VO+	Auxiliary +24VDC power supply terminal


Terminal block and wiring diagram for CPU Modules

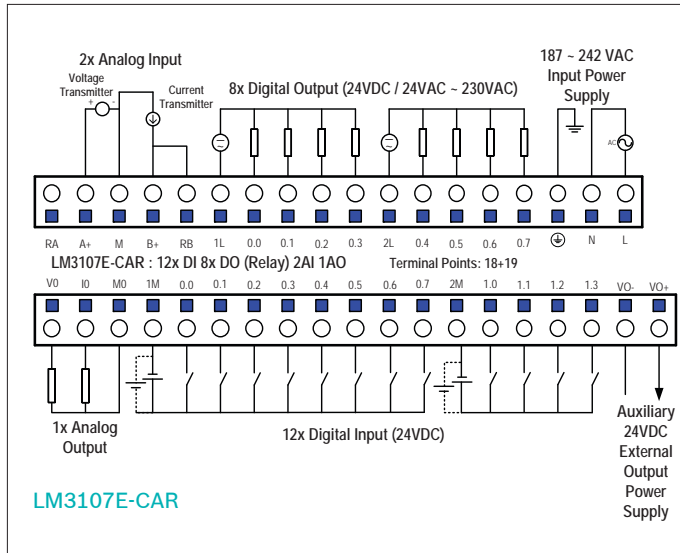

Top Terminal Block	Top Terminal Description	Bottom Terminal Block	Bottom Terminal Description
RA	Analog Input #A (Current)	VO	Analog Output (Voltage)
A+	Analog Input #A (Voltage)	IO	Analog Output (Current)
M	AI common terminal	MO	Common terminal of AO
B+	Analog Input #B (Voltage)	1M	DI common terminal of group #1 (connect to 24VDC +/- terminal corresponding to source/sink DI)
RB	Analog Input #B (Current)	IO.0	Digital input #0 / high-speed input counter
1L	DO common terminal of group #1 (24VDC or 230VAC supply)	IO.1	Digital input #1 / high-speed input counter control
Q0.0	Digital output #0	IO.2	Digital input #2 / high-speed input counter
Q0.1	Digital output #1	IO.3	Digital input #3 / high-speed input counter control
Q0.2	Digital output #2	IO.4	Digital input #4
Q0.3	Digital output #3	IO.5	Digital input #5
2L	DO common terminal of group #2 (24VDC or 230VAC supply)	IO.6	Digital input #6 / high-speed input counter / external interrupt input / pulse catch input
Q0.4	Digital output #4	IO.7	Digital Input #7 / external interrupt input / pulse catch input
Q0.5	Digital output #5	2M	DI common terminal of group #2 (connect to 24VDC +/- terminal corresponding to source/sink DI)
Q0.6	Digital output #6	11.0	Digital Input #8 / external interrupt input / pulse catch input
Q0.7	Digital output #7	11.1	Digital Input #9 / external interrupt input / pulse catch input
⊕	EARTH GROUND	11.2	Digital Input #10
N	230VAC Neutral	11.3	Digital Input #11
L	234VAC Live	VO-	Auxiliary -24VDC GND terminal
		VO+	Auxiliary +24VDC power supply terminal

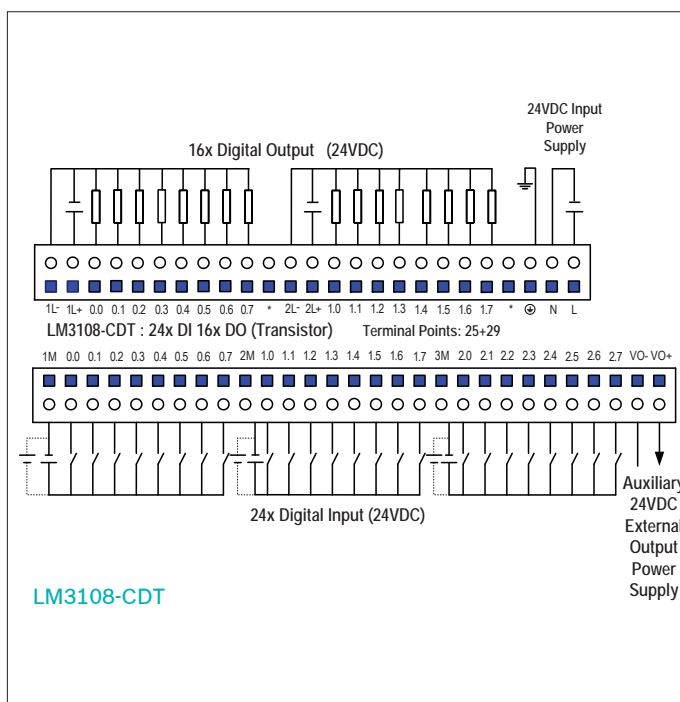

Top Terminal Block	Top Terminal Description	Bottom Terminal Block	Bottom Terminal Description
1V-	DO load drive supply -24VDC GND terminal	1M	DI common terminal of group #1 (connect to 24VDC +/- terminal corresponding to source/sink DI)
1V+	DO load drive supply +24VDC terminal	IO.0	Digital input #0 / high-speed input counter
Q0.0	Digital output #0	IO.1	Digital input #1 / high-speed input counter control
Q0.1	Digital output #1	IO.2	Digital input #2 / high-speed input counter
Q0.2	Digital output #2	IO.3	Digital input #3 / high-speed input counter control
Q0.3	Digital output #3 / high-speed pulse output	IO.4	Digital input #4 / normal input counter
Q0.4	Digital output #4	IO.5	Digital input #5 / normal input counter control
Q0.5	Digital output #5	IO.6	Digital input #6 / high-speed input counter / external interrupt input / pulse catch input
Q0.6	Digital output #6	IO.7	Digital input #7 / external interrupt input / pulse catch input
Q0.7	Digital output #7	2M	DI common terminal of group #2 (connect to 24VDC +/- terminal corresponding to source/sink DI)
*	Not in used	11.0	Digital Input #8 / external interrupt input / pulse catch input
2V-	DO load drive supply -24VDC GND terminal	11.1	Digital Input #9 / external interrupt input / pulse catch input
2V+	DO load drive supply +24VDC terminal	11.2	Digital input #10
Q1.0	Digital output #8	11.3	Digital input #11
Q1.1	Digital output #9 / high-speed pulse output	11.4	Digital input #12
Q1.2	Digital output #10	11.5	Digital input #13
Q1.3	Digital output #11	11.6	Digital input #14
Q1.4	Digital output #12	11.7	Digital input #15
Q1.5	Digital output #13	3M	DI common terminal of group #3 (connect to 24VDC +/- terminal corresponding to source/sink DI)
Q1.6	Digital output #14	12.0	Digital Input #16
Q1.7	Digital output #15	12.1	Digital Input #17
*	Not in used	12.2	Digital Input #18
⊕	EARTH GROUND	12.3	Digital Input #19
VI-	-24VDC power supply GND terminal	12.4	Digital Input #20
VI+	+24VDC power supply terminal	12.5	Digital Input #21
		12.6	Digital Input #22
		12.7	Digital Input #23
		VO-	Auxiliary -24VDC GND terminal
		VO+	Auxiliary +24VDC power supply terminal

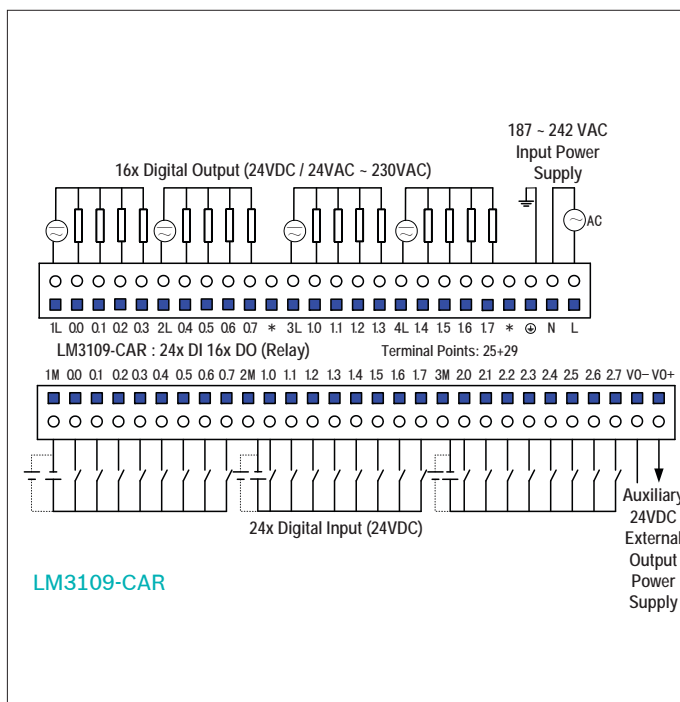

Top Terminal Block	Top Terminal Description	Bottom Terminal Block	Bottom Terminal Description
1L	DO common terminal of group #1 (24VDC or 230VAC supply)	1M	DI common terminal of group #1 (connect to 24VDC +/- terminal corresponding to source/sink DI)
Q0.0	Digital output #0	IO.0	Digital input #0 / high-speed input counter
Q0.1	Digital output #1	IO.1	Digital input #1 / high-speed input counter control
Q0.2	Digital output #2	IO.2	Digital input #2 / high-speed input counter
Q0.3	Digital output #3	IO.3	Digital input #3 / high-speed input counter control
2L	DO common terminal of group #2 (24VDC or 230VAC supply)	IO.4	Digital input #4
Q0.4	Digital output #4	IO.5	Digital input #5
Q0.5	Digital output #5	IO.6	Digital input #6 / high-speed input counter / external interrupt input / pulse catch input
Q0.6	Digital output #6	IO.7	Digital Input #7 / external interrupt input / pulse catch input
Q0.7	Digital output #7	2M	DI common terminal of group #2 (connect to 24VDC +/- terminal corresponding to source/sink DI)
*	Not in used	11.0	Digital Input #8 / external interrupt input / pulse catch input
3L	DO common terminal of group #3 (24VDC or 230VAC supply)	11.1	Digital Input #9 / external interrupt input / pulse catch input
Q1.0	Digital output #8	11.2	Digital Input #10
Q1.1	Digital output #9	11.3	Digital Input #11
Q1.2	Digital output #10	11.4	Digital Input #12
Q1.3	Digital output #11	11.5	Digital Input #13
4L	DO common terminal of group #4 (24VDC or 230VAC supply)	11.6	Digital Input #14
Q1.4	Digital output #12	11.7	Digital Input #15
Q1.5	Digital output #13	3M	DI common terminal of group #3 (connect to 24VDC +/- terminal corresponding to source/sink DI)
Q1.6	Digital output #14	12.0	Digital Input #16
Q1.7	Digital output #15	12.1	Digital Input #17
*	Not in used	12.2	Digital Input #18
⊕	EARTH GROUND	12.3	Digital Input #19
N	230VAC Neutral	12.4	Digital Input #20
L	234VAC Live	12.5	Digital Input #21
		12.6	Digital Input #22
		12.7	Digital Input #23
		VO-	Auxiliary -24VDC GND terminal
		VO+	Auxiliary +24VDC power supply terminal

THE DIGITAL I/O MODULES

DIGITAL INPUT MODULES			DIGITAL OUTPUT MODULES			DIGITAL MIX MODULES
	8 points digital input	16 points digital input		8 points digital output	16 points digital output	8 points digital mix
24 VDC Input	LM3210-EDI 8x DI	LM3212-EDI 16x DI	Transistor Output	LM3220-EDOT 8x DO transistor	LM3221-EDOT 16x DO transistor	LM3230-EDMT 4x DI, 4x DO transistor
164 ~ 264 VAC Input	LM3211--EDIA 8x DI		Relay Output	LM3222-EDOR 8x DO relay	LM3223-EDOR 16x DO relay	LM3231-EDMR 4x DI, 4x DO relay

The Digital Input Modules

	LM3210-EDI, 8x DI	LM3212-EDI, 16x DI	LM3211-EDIA, 8x DI, AC INPUT
Input Specifications			
Input type	Sink / Source	Sink / Source	----
Number of DC inputs	8	16	8
Input voltage	24 VDC	24 VDC	230 VAC
Voltage-permissible range	0 ~ 30 VDC	0 ~ 30 VDC	164 ~ 264 VAC (50 / 60 Hz)
Logic 1 signal	15 VDC at 3 mA (minimum)	15 VDC at 3 mA (minimum)	164 VAC
Logic 0 signal	5 VDC at 1 mA (maximum)	5 VDC at 1 mA (maximum)	80 VAC
Optical isolation (galvanic)	500 VAC for 1 minute	500 VAC for 1 minute	500 VAC for 1 minute
Input delay	< 10 ms (constant input voltage)	< 10 ms (constant input voltage)	< 20 ms (constant input voltage)
Isolation group	2 groups (4 in / 4 in)	4 groups (4 in / 4 in / 4 in / 4 in)	8 groups
Power consumption			
+24 VDC (from expansion)	0 mA	0 mA	0 mA
+24 VDC (from external)	40 mA	80 mA	0 mA
+5 VDC (from expansion bus)	60 mA	90 mA	60 mA
Physical Specifications			
Size of module	50 mm (L) × 90 mm (W) × 70 mm (H)	75 mm (L) × 90 mm (W) × 70 mm (H)	75 mm (L) × 90 mm (W) × 70 mm (H)
Weight	110 g	160 g	160 g
Ambient operating environment	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting
Relative humidity	5% ~ 95% non-condensing, no corrosive gas	5% ~ 95% non-condensing, no corrosive gas	5% ~ 95% non-condensing, no corrosive gas
Storage environment	-40° to +70° C, 25° to 55° C 95%	-40° to +70° C, 25° to 55° C 95%	-40° to +70° C, 25° to 55° C 95%
Mechanical shock	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes
Sinusoidal vibration	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute
Mechanical protection	IP20	IP20	IP20
Agency approvals	CE approved (EMC and LVD)	CE approved (EMC and LVD)	CE approved (EMC and LVD)

* For more details, please refer to the respective terminal block and wiring diagram on page 31.

LM3220-EDOT, 8x DO, transistor		LM3221-EDOT, 16x DO, transistor
Output Specifications		
Output type	Transistor, Solid-state MOSFET	Transistor, Solid-state MOSFET
Number of DC outputs	8	16
Permissible range	20.4 ~ 28.8 VDC	20.4 ~ 28.8 VDC
Rated value	24 VDC	24 VDC
Logic 1 signal at max. current	20 VDC (minimum)	20 VDC (minimum)
Logic 0 signal with 10 K Ω load	1 VDC (maximum)	1 VDC (maximum)
Output current logic 1 signal	1 A	1 A
Output current logic 0 signal	1 mA	1 mA
Max. current per common/group	< 4 A	< 4 A
ON state resistance (contact)	< 0.2 Ω	< 0.2 Ω
Surge current	< 8 A for 100 ms, max.	< 8 A for 100 ms, max.
Overload protection	No	No
Optical isolation (galvanic)	500 VAC for 1 minute	500 VAC for 1 minute
Isolation		
Isolation resistance	-----	-----
Isolation coil to contact	-----	-----
Isolation between open contacts	-----	-----
Isolation group	2 groups (4 out / 4 out)	4 groups (4 out / 4 out / 4 out / 4 out)
Output delay (off to on / on to off)	< 1ms	< 1ms
Pulse train output frequency	-----	-----
Relay lifespan		
Switching delay	-----	-----
Lifetime mechanical (no load)	-----	-----
Lifetime contacts at rated load	-----	-----
Power consumption		
+24 VDC (from expansion bus)	0 mA	0 mA
+24 VDC (from external)	Depending on actual load	Depending on actual load
+5 VDC (from expansion bus)	100 mA	180 mA
Physical Specifications		
Size of module	50 mm (L) \times 90 mm (W) \times 70 mm (H)	75 mm (L) \times 90 mm (W) \times 70 mm (H)
Weight	120 g	170 g
Ambient operating environment	0° to 55° C, horizontal mounting	0° to 55° C, horizontal mounting
Relative humidity	5% ~ 95% non-condensing, no corrosive gas	5% ~ 95% non-condensing, no corrosive gas
Storage environment	-40° to +70° C, 25° to 55° C 95% humidity	-40° to +70° C, 25° to 55° C 95% humidity
Mechanical shock	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes
Sinusoidal vibration	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute
Mechanical protection	IP20	IP20
Agency approvals	CE approved (EMC and LVD)	CE approved (EMC and LVD)

* For more details, please refer to the respective terminal block and wiring diagram on page 31.




LM3222-EDOR, 8x DO, relay		LM3223-EDOR, 16x DO, relay
Output Specifications		
Output type	Relay, dry contact	Relay, dry contact
Number of DC outputs	8	16
Permissible range	5 ~ 30 VDC or 5 ~ 250 VAC	5 ~ 30 VDC or 5 ~ 250 VAC
Rated value	-----	-----
Logic 1 signal at max. current	-----	-----
Logic 0 signal with 10 K Ω load	-----	-----
Output current logic 1 signal	2 A	2 A
Output current logic 0 signal	0 A	0 A
Max. current per common/group	< 10 A	< 10 A
ON state resistance (contact)	< 0.2 Ω	< 0.2 Ω
Surge current	-----	-----
Overload protection	No	No
Optical isolation (galvanic)	-----	-----
Isolation		
Isolation resistance	100 M Ω (minimum)	100 M Ω (minimum)
Isolation coil to contact	3000 VAC for 1 minute	3000 VAC for 1 minute
Isolation between open contacts	750 VAC for 1 minute	750 VAC for 1 minute
Isolation group	2 groups (4 out / 4 out)	4 groups (4 out / 4 out / 4 out / 4 out)
Output delay (off to on / on to off)	-----	-----
Pulse train output frequency	1 Hz (maximum)	1 Hz (maximum)
Relay lifespan		
Switching delay	< 10ms (maximum)	< 10ms (maximum)
Lifetime mechanical (no load)	10,000,000 open / close	10,000,000 open / close
Lifetime contacts at rated load	100,000 open / close	100,000 open / close
Power consumption		
+24 VDC (from expansion bus)	40 mA	80 mA
+24 VDC (from external)	Depending on actual load	Depending on actual load
+5 VDC (from expansion bus)	60 mA	120 mA
Physical Specifications		
Size of module	50 mm (L) \times 90 mm (W) \times 70 mm (H)	75 mm (L) \times 90 mm (W) \times 70 mm (H)
Weight	140 g	200 g
Ambient operating environment	0° to 55° C, horizontal mounting	0° to 55° C, horizontal mounting
Relative humidity	5% ~ 95% non-condensing, no corrosive gas	5% ~ 95% non-condensing, no corrosive gas
Storage environment	-40° to +70° C, 25° to 55° C 95% humidity	-40° to +70° C, 25° to 55° C 95% humidity
Mechanical shock	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes
Sinusoidal vibration	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute
Mechanical protection	IP20	IP20
Agency approvals	CE approved (EMC and LVD)	CE approved (EMC and LVD)

* For more details, please refer to the respective terminal block and wiring diagram on page 31.

LM3230-EDMT, 4DI 4DO (transistor)		LM3231-EDMR, 4DI 4DO (relay)
Input Specifications		
Input type	Sink / Source	Sink / Source
Number of DC inputs	4	4
Input voltage	24 VDC	24 VDC
Voltage-permissible range	0 ~ 30 VDC	0 ~ 30 VDC
Logic 1 signal	15 VDC at 3 mA (minimum)	15 VDC at 3 mA (minimum)
Logic 0 signal	5 VDC at 1 mA (maximum)	5 VDC at 1 mA (maximum)
Optical isolation (galvanic)	500 VAC for 1 minute	500 VAC for 1 minute
Input delay	< 10 ms (constant input voltage)	< 10 ms (constant input voltage)
Isolation group	1 group	1 group
Output Specifications		
Output type	Transistor, Solid-state MOSFET	Relay, dry contact
Number of DC outputs	4	4
Permissible range	20.4 ~ 28.8 VDC	5 ~ 30 VDC or 5 ~ 250 VAC
Rated value	24 VDC	-----
Logic 1 signal at max. current	20 VDC (minimum)	-----
Logic 0 signal with 10 K Ω load	1 VDC (maximum)	-----
Output current logic 1 signal	1 A	2 A
Output current logic 0 signal	1 mA	0 A
Max. current per common/group	< 4 A	< 10 A
ON state resistance (contact)	< 0.2 Ω	< 0.2 Ω
Surge current	< 8 A for 100 ms, max.	-----
Overload protection	No	No
Optical isolation (galvanic)	500 VAC for 1 minute	-----
Isolation		
Isolation resistance	-----	100 M Ω (minimum)
Isolation coil to contact	-----	3000 VAC for 1 minute
Isolation between open contacts	-----	750 VAC for 1 minute
Isolation group	1 group	1 group
Output delay (off to on / on to off)	< 1ms	-----
Pulse train output frequency	-----	1 Hz (maximum)
Relay lifespan		
Switching delay	-----	< 10ms (maximum)
Lifetime mechanical (no load)	-----	10,000,000 open / close
Lifetime contacts at rated load	-----	100,000 open / close
Power consumption		
+24 VDC (from expansion bus)	0 mA	20 mA
+24 VDC (from external)	Depending on load	Depending on load
+5 VDC (from expansion bus)	90 mA	90 mA
Physical Specifications		
Size of module	50 mm (L) \times 90 mm (W) \times 70 mm (H)	50 mm (L) \times 90 mm (W) \times 70 mm (H)
Weight	120 g	120 g
Ambient operating environment	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting
Relative humidity	5% ~ 95% non-condensing, no corrosive gas	5% ~ 95% non-condensing, no corrosive gas
Storage environment	-40° to +70° C, 25° to 55° C 95% humidity	-40° to +70° C, 25° to 55° C 95% humidity
Mechanical shock	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes
Sinusoidal vibration	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute
Mechanical protection	IP20	IP20
Agency approvals	CE approved (EMC and LVD)	CE approved (EMC and LVD)

* For more details, please refer to the respective terminal block and wiring diagram on page 31.

Terminal block and wiring diagram for Digital I/O Modules

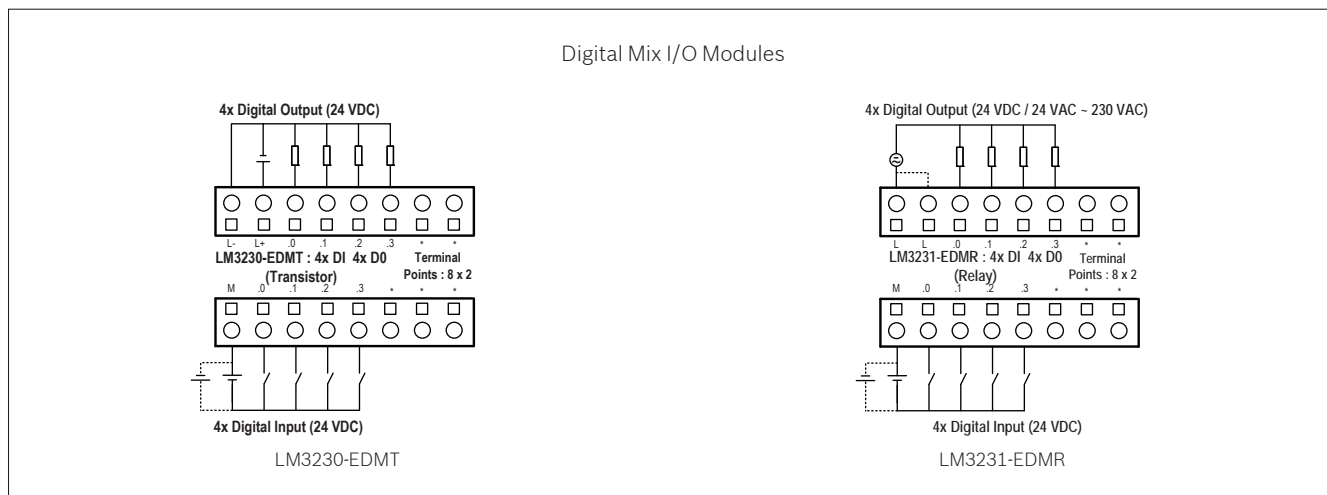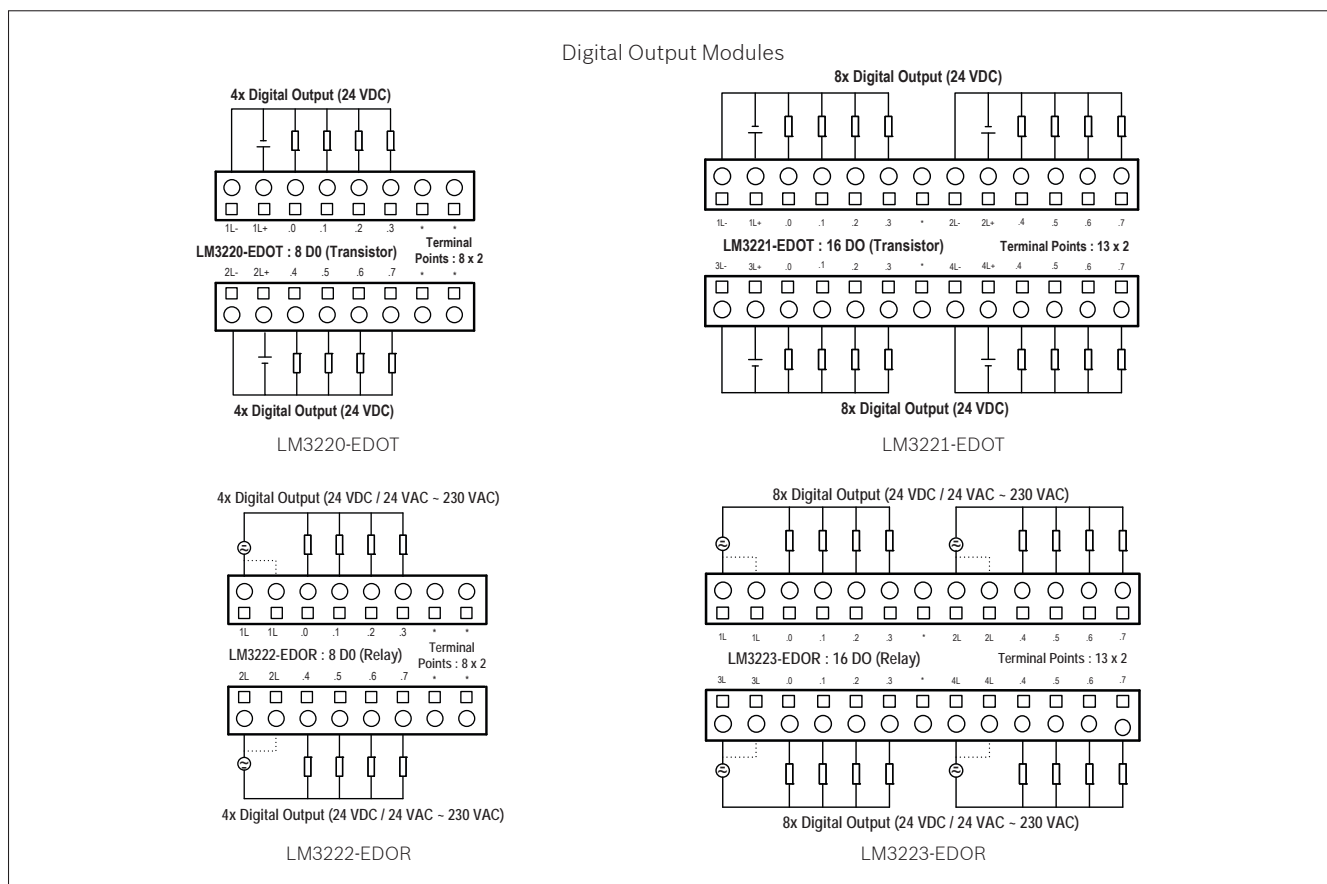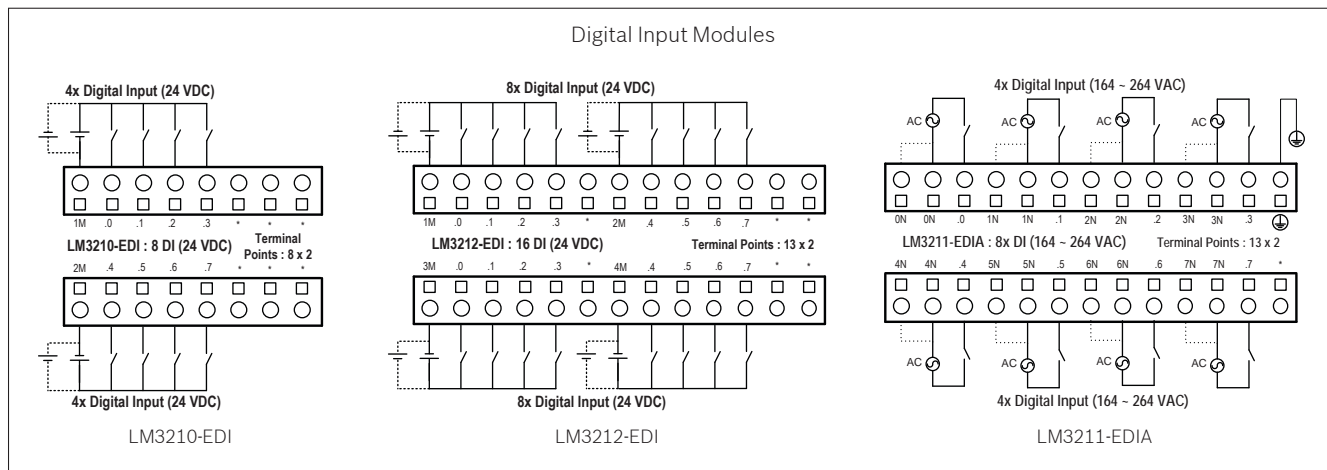

THE ANALOG I/O MODULES



ANALOG INPUT MODULES						ANALOG OUTPUT MODULES	ANALOG MIX MODULES	
	Pseudo-differential	Single-Ended		Thermo-couple	RTD	NTC	2 channels	4 In + 1 Out
4 channels	LM3310-EAI	LM3310A-EAI	LM3310B-EAI	LM3311-EAI	LM3312-EAI		LM3320-EAO	LM3330-EAM
8 channels		LM3313-EAI				LM3314-EAI		

The Analog Input Modules

		LM3310-EAI, 4x AI	LM3310A-EAI, 4x AI
Analog Input Specifications			
Number of analog input		4 channels	4 channels
Input type		Pseudo-differential	Single-ended
Input range	Voltage	0 ~ 10 V	0 ~ 10 V
	Current	0 ~ 20 mA 4 ~ 20 mA	0 ~ 20 mA 4 ~ 20 mA
Resolution		12 bit A/D converter	12 bit A/D converter
Accuracy, typical 25° C		±0.5% of full-scale	±0.5% of full-scale
Data word format		0 to 65535	0 to 65535
Input impedance		1 MΩ (Voltage), 250 Ω (Current)	1 MΩ (Voltage), 250 Ω (Current)
Maximum input voltage		< 30 V	< 30 V
Maximum input current		< 30 mA	< 30 mA
Temperature drift		± 100ppm / °C	± 100ppm / °C
Isolation (field side to logic)		Field and system side only; no isolation between channels	None
Isolation endurance		500 VAC for 1 minute	500 VAC for 1 minute
Analog Input step response		6 ms to 95% every 4 channels	6 ms to 95% every 4 channels
Analog to digital conversion time		< 200 μS	< 200 μS
Common mode rejection ratio		> 60 dB, DC to 50Hz	-----
Common mode voltage		Signal voltage plus common voltage (must be < 13V)	-----
Power consumption			
+24 VDC (expansion bus)		20 mA	10 mA
+5 VDC (expansion bus)		100 mA	40 mA
Physical Specifications			
Size of module		75 mm (L) × 90 mm (W) × 70 mm (H)	75 mm (L) × 90 mm (W) × 70 mm (H)
Weight		170 g	170 g
Ambient operating environment		0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting
Relative humidity		5% ~ 95% non-condensing, no corrosive gas	5% ~ 95% non-condensing, no corrosive gas
Storage environment		-40° to +70° C, 25° to 55° C 95% humidity	-40° to +70° C, 25° to 55° C 95% humidity
Mechanical shock		15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes
Sinusoidal vibration		0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute
Mechanical protection		IP20	IP20
Agency approvals		CE approved (EMC and LVD)	CE approved (EMC and LVD)

* For more details, please refer to the respective terminal block and wiring diagram on page 36.

		LM3310B-EAI, 4x AI	LM3313-EAI, 4x AI
Analog Input Specifications			
Number of analog input		4 channels	8 channels
Input type		Single-ended	Single-ended
Input range	Voltage	0 ~ 100 mV 0 ~ 500 mV 0 ~ 1 V 0 ~ 5 V 0 ~ 10 V	-10 ~ +10 V
	Current	0 ~ 20 mA	-20 ~ +20 mA
Resolution		16 bit A/D converter	12 bit A/D converter
Accuracy, typical 25° C		±0.5% of full-scale (0 ~ 100 mV, 0 ~ 500 mV) ±0.2% of full-scale (0~1 V, 0~5 V, 0~10 V)	±0.5% of full-scale
Data word format		0 to 65535	-32000 to +32000
Input impedance		1 MΩ (Voltage), 250 Ω (Current)	1 MΩ (Voltage), 500 Ω (Current)
Maximum input voltage		< 30 V	< 15 V
Maximum input current		< 30 mA	< 30 mA
Temperature drift		± 100ppm / °C	± 100ppm / °C
Isolation (field side to logic)		Field and system side only; no isolation between channels	Field and system side only; no isolation between channels
Isolation endurance		500 VAC for 1 minute	500 VAC for 1 minute
Analog Input step response		50 ms to 95% every 4 channels	15 ms to 95% every 8 channels
Analog to digital conversion time		< 200 μS	< 200 μS
Common mode rejection ratio		-----	-----
Common mode voltage		-----	-----
Power consumption			
+24 VDC (expansion bus)		30 mA	35 mA
+5 VDC(expansion bus)		60 mA	100 mA
Physical Specifications			
Size of module		75 mm (L) × 90 mm (W) × 70 mm (H)	75 mm (L) × 90 mm (W) × 70 mm (H)
Weight		170 g	170 g
Ambient operating environment		0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting
Relative humidity		5% ~ 95% non-condensing, no corrosive gas	5% ~ 95% non-condensing, no corrosive gas
Storage environment		-40° to +70° C, 25° to 55° C 95% humidity	-40° to +70° C, 25° to 55° C 95% humidity
Mechanical shock		15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes
Sinusoidal vibration		0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute
Mechanical protection		IP20	IP20
Agency approvals		CE approved (EMC and LVD)	CE approved (EMC and LVD)

*For more details, please refer to the respective terminal block and wiring diagram on page 36.

The Analog Input Modules




LM3311-EAI, 4x AI (Thermocouple)		LM3312-EAI, 4x AI (RTD)	LM3314-EAI, 8x AI (NTC)
Analog Input Specifications			
Number of analog input	4 channels	4 channels	4 channels
Input type	Thermocouple	RTD type (select one): Pt-100 or Cu-50	NTC
Input range	Thermocouple type (select one): J, K, T, N, E, R, S, B Voltage range: ± 80 mV	Pt-100 (-150 ~ 619.6 °C) Pt-100 (-150 ~ 157.2 °C) Cu-50 (-50 ~ 150 °C) Cu-50 (-50 ~ 140.1 °C)	R = 10K at 25 °C, B value is selectable
Input temperature resolution	0.1 °C / 0.1 °F	0.1 °C / 0.1 °F	0.1 °C / 0.1 °F
Accuracy, typical 25 °C	$\pm 0.1\%$ of full-scale	$\pm 1^\circ$ C of full-scale	$\pm 0.2\%$ of full-scale
Data word format	J: -210 ~ 1200 °C: -2100 ~ 12000 K: -270 ~ 1370 °C: -2700 ~ 13700 N: -270 ~ 1300 °C: -2700 ~ 13000 E: -270 ~ 1000 °C: -2700 ~ 10000 T: -270 ~ 400 °C: -2700 ~ 4000 R: -50 ~ 1768 °C: -500 ~ 17680 S: -50 ~ 1768 °C: -500 ~ 17680 B: 0 ~ 1820 °C: 0 ~ 18200 -80 ~ 80 mV: -8000 ~ 8000	Pt-100 (-150 ~ 619.6 °C): -1500 ~ 6196 Pt-100 (-150 ~ 157.2 °C): -1500 ~ 1572 Cu-50 (-50 ~ 150 °C): -500 ~ 1500 Cu-50 (-50 ~ 140.1 °C): -500 ~ 1401	-20 °C ~ 100 °C: -200 ~ 1000
Input impedance	> 1 M Ω	-----	-----
Suppression of interference	70 dB @ 50 Hz	70 dB @ 50 Hz	60 dB @ 50 Hz
Temperature drift	± 50 ppm / °C	± 100 ppm / °C	± 100 ppm / °C
Isolation (field side to logic)	Field and system side only; no isolation between channels	Field and system side only; no isolation between channels	Field and system side only; no isolation between channels
Isolation endurance	500 VAC for 1 minute	500 VAC for 1 minute	500 VAC for 1 minute
Module update time: All channels	450 ms every 4 channels	450 ms every 4 channels	1 s every 8 channels
Cold junction error	$\pm 1.5^\circ$ C / 1.5 °F	-----	-----
Cold junction compensation	Supported	-----	-----
Open-wire detection	Supported	Supported	Supported
Power consumption			
+24 VDC (from expansion bus)	0 mA	0 mA	0 mA
+24 VDC (from external)	-----	-----	40 mA
+5 VDC (from expansion bus)	100 mA	120 mA	100 mA
Physical Specifications			
Size of module	75 mm (L) \times 90 mm (W) \times 70 mm (H)	75 mm (L) \times 90 mm (W) \times 70 mm (H)	75 mm (L) \times 90 mm (W) \times 70 mm (H)
Weight	160 g	160 g	160 g
Ambient operating environment	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting
Relative humidity	5% ~ 95% non-condensing, no corrosive gas	5% ~ 95% non-condensing, no corrosive gas	5% ~ 95% non-condensing, no corrosive gas
Storage environment	-40° to +70° C, 25° to 55° C 95% humidity	-40° to +70° C, 25° to 55° C 95% humidity	-40° to +70° C, 25° to 55° C 95% humidity
Mechanical shock	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes
Sinusoidal vibration	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute
Mechanical protection	IP20	IP20	IP20
Agency approvals	CE approved (EMC and LVD)	CE approved (EMC and LVD)	CE approved (EMC and LVD)

* For more details, please refer to the respective terminal block and wiring diagram on page 36.



		LM3320-EAO, 4x AO	LM3330-EAM, 4x AI, 1x AO
Analog Input Specifications			
Number of analog input		-----	4 channels
Input type		-----	Single-ended
Input range	Voltage	-----	0 ~ 10 V
	Current	-----	0 ~ 20 mA 4 ~ 20 mA
Resolution		-----	12 bit A/D converter
Accuracy, typical 25° C		-----	±0.5% of full-scale
Data word format		-----	0 to 65535
Input impedance		-----	1 MΩ (Voltage), 250 Ω (Current)
Maximum input voltage		-----	< 30 V
Maximum input current		-----	< 30 mA
Temperature drift		-----	± 100ppm / °C
Isolation (field side to logic)		-----	None
Isolation endurance		-----	500 VAC for 1 minute
Analog Input step response		-----	6 ms to 95% every 4 channels
Analog to digital conversion time		-----	< 200 μS
Analog Output Specifications			
Number of analog output		2 channels	1 channels
Output Range	Voltage output	0 ~ 10 V	0 ~ 10 V
	Current output	0 ~ 20 mA	0 ~ 20 mA
Accuracy, typical 25° C		±0.5% of full-scale	±0.5% of full-scale
Data word format		0 to 4095	0 to 4095
Temperature drift		± 100ppm / °C	± 100ppm / °C
Settling time	Voltage output	≤ 3 ms	< 100 μS
	Current output	≤ 3 ms	< 1 mS
Maximum drive	Voltage output	2000 Ω (minimum)	2000 Ω (minimum)
	Current output	600 Ω (maximum)	600 Ω (maximum)
Isolation (field side to logic)		Field and system side only; no isolation between channels	None
Isolation endurance		1500 VAC for 1 minute	-----
Power consumption			
+24 VDC (from expansion bus)		0 mA	30 mA
+24 VDC (from external)		80 mA	0 mA
+5 VDC (from expansion bus)		60 mA	50 mA
Physical Specifications			
Size of module		75 mm (L) × 90 mm (W) × 70 mm (H)	75 mm (L) × 90 mm (W) × 70 mm (H)
Weight		160 g	200 g
Ambient operating environment		0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting
Relative humidity		5% ~ 95% non-condensing, no corrosive gas	5% ~ 95% non-condensing, no corrosive gas
Storage environment		-40° to +70° C, 25° to 55° C 95% humidity	-40° to +70° C, 25° to 55° C 95% humidity
Mechanical shock		15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes
Sinusoidal vibration		0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute
Mechanical protection		IP20	IP20
Agency approvals		CE approved (EMC and LVD)	CE approved (EMC and LVD)

* For more details, please refer to the respective terminal block and wiring diagram on page 36.

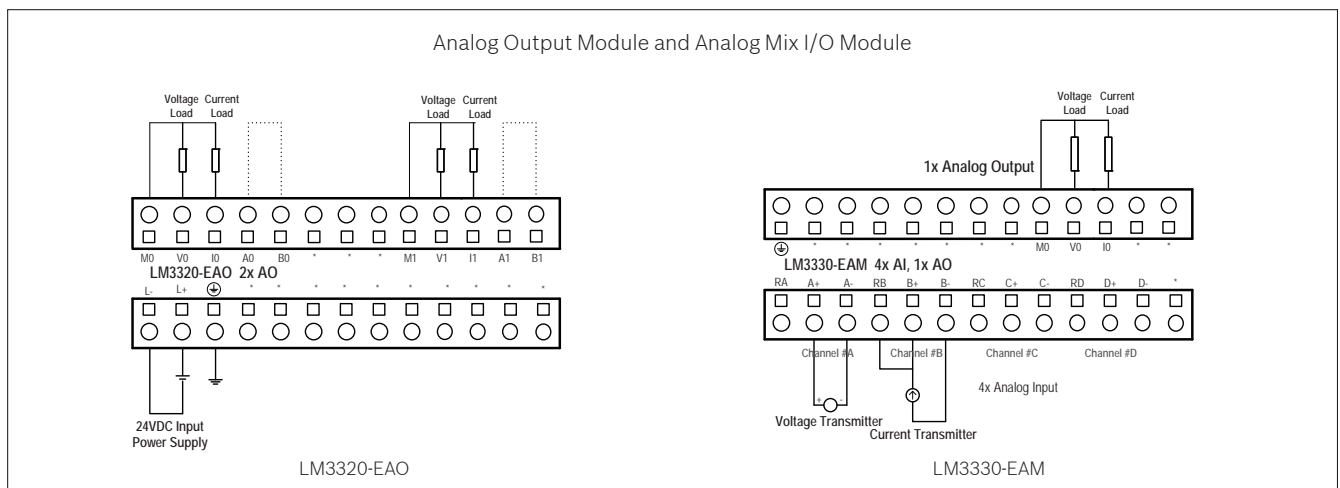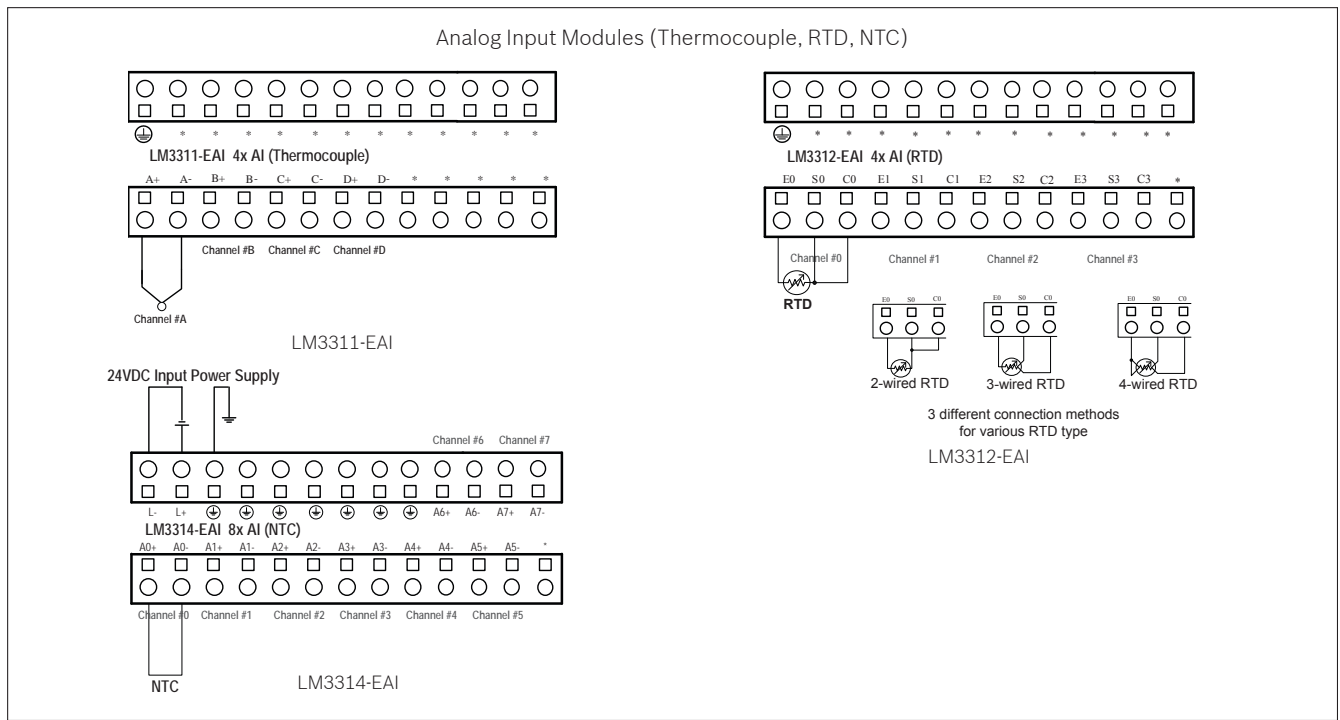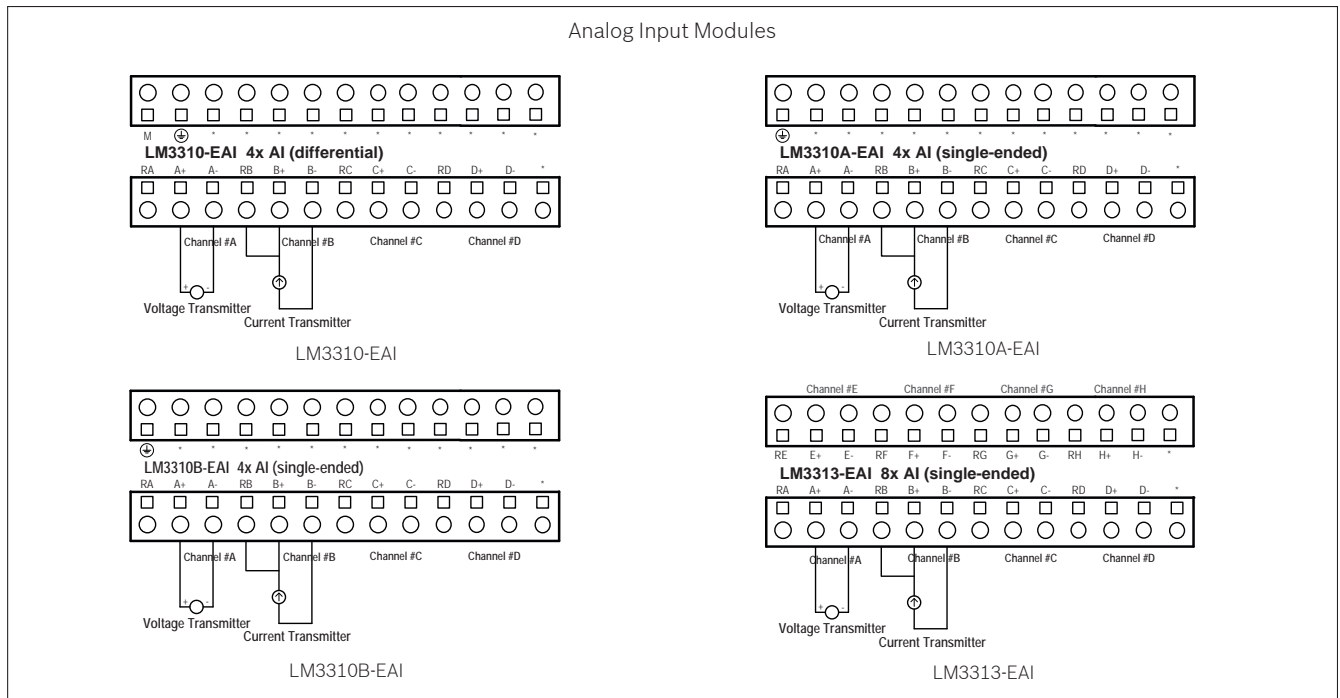
Terminal block and wiring diagram for Analog I/O Modules




THE COMMUNICATION MODULES

PROFIBUS-DP SLAVE	ETHERNET
 LM3401-EPFD	 LM3403-EETH

LM3401-EPFD, PROFIBUS-DP SLAVE		LM3403-EETH, ETHERNET
Communication Specifications		
Number of communication port	1 port	1 port (can communicate only with 1 MODBUS TCP master station at any one time)
Area restriction	-----	LAN (does not support internet)
Interface	9 pin D socket type or wiring terminal	Ethernet RJ-45 socket
Protocol	PROFIBUS-DP slave station mode	MODBUS TCP slave station mode
Configuration	-----	IP address, subnetmask, gateway IP, read & write data length. Factory default IP address: 172.20.45.160 * note: Does not required to configure MAC_address
Communication baud rate	Profibus-DP 9.6, 19.2, 45.45, 93.75, 187.5, 500 kbps, and 1, 1.5, 3, 6, 12Mbps (auto-adaptive)	10 Mbps
Station adress setup	0 ~ 126 (dial switch selectable)	-----
Input / Output section size	64 byte each (maximum)	200 bytes each (maximum)
Maximum station for each section	32	Depends on configuration
Maximum station for each network	126	Depends on configuration
Isolation mode	Optical-coupler isolation	-----
Isolation endurance	500 VAC for 1 min	-----
Power consumption		
+24 VDC (from expansion bus)	20 mA	0 mA
+5 VDC(from expansion bus)	120 mA	80 mA
Physical Specifications		
Size of module	75 mm (L) × 90 mm (W) × 70 mm (H)	75 mm (L) × 90 mm (W) × 70 mm (H)
Weight	160 g	160 g
Ambient operating environment	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting	0° to 55° C, horizontal mounting 0° to 45° C, vertical mounting
Relative humidity	5% ~ 95% non-condensing, no corrosive gas	5% ~ 95% non-condensing, no corrosive gas
Storage environment	-40° to +70° C, 25° to 55° C 95% humidity	-40° to +70° C, 25° to 55° C 95% humidity
Mechanical shock	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes	15 G (147m/S ²), 11 ms pulse, 6 shocks in each of 3 axes
Sinusoidal vibration	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute	0.30 mm peak-to-peak 10 to 57 Hz; 2 G panel mount, 1G DIN rail mount, 57 Hz to 150 Hz; 10 sweeps each axis, 1 octave/minute
Mechanical protection	IP20	IP20
Agency approvals	CE approved (EMC and LVD)	CE approved (EMC and LVD)

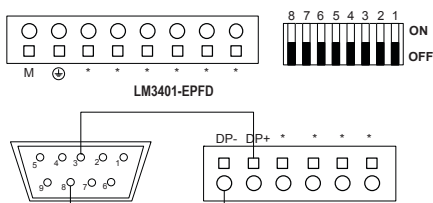


Terminal Block and Wiring Diagram




LM3403-EETH Ethernet Connection

Mounting

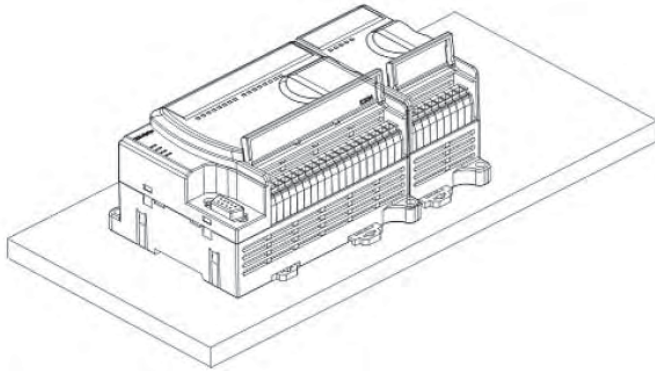


Backplane or Wall Mounted

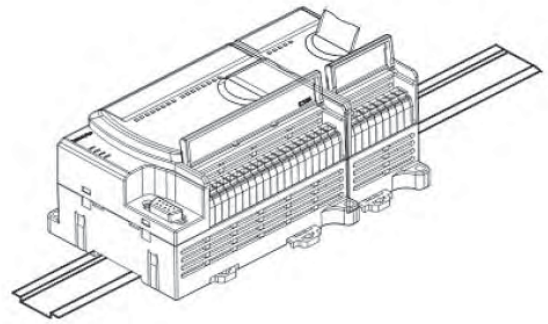


35mm DIN Rail Mounted


Connection between modules

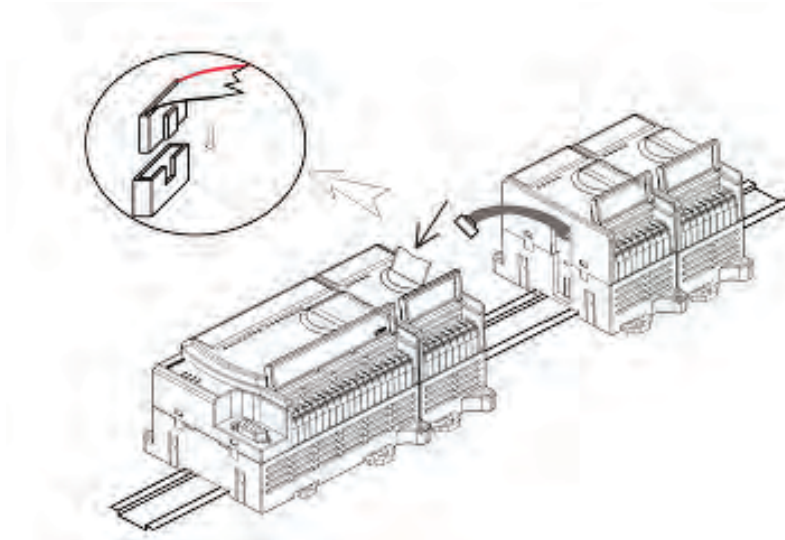


Dimension

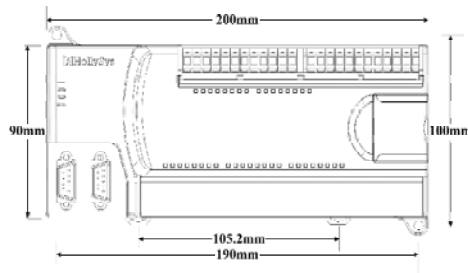


CPU module




CPU module



I/O module or communication module



I/O module



side view of any module

HollySys

HollySys has been committed in research and development of products for industrial automation and control providing the industry a complete solution fulfilling the requirements and needs.

The LM MICRO SERIES PLC (Programmer Logic Controller) is the new generation high performance compact size PLC integrated with the latest technology in PLC for discrete application in industrial automation.

LM MICRO PLC is fully designed and developed by HollySys back with careful thoughts and consideration in the design of system, hardware, software, networking, and data communication. Based on user application habits and ease of use, HollySys have developed an extremely high performance, quality, versatile, practical, easy to use, and compact micro PLC product.

LM MICRO PLC is the result of technology combination from automatic control, electronics, communication, computer, and by absorbing the experience and knowledge of our automation expert over the years in the field of PLC technology application.

HollySys will continue to grow and provide specialized solution to the automation industry by delivering cost-effective, high performance, high quality product with excellent services and support hereby enhancing the needs in the factory, manufacturing and industrial automation sector.

Automation and Control

For 15 years, the HollySys name has stood for quality and reliability. HollySys proudly offers a wide range of automation and control products from PLCs to DCS to help you find the solution for any industrial automation and process control application. We are the global supplier of choice for innovative technology backed by the highest level of service and support. When you need products and solutions you can rely on, choose HollySys.

HollySys (Asia Pacific) Pte Ltd

200 Pandan Loop, #08-01
Pantech 21, Singapore 128388
Tel: (65) 6777-0950
Fax: (65) 6777-2730


Headquarters

Beijing HollySys Co., Ltd

No. 10 Jiancaicheng Middle Road,
Xisanqi, Haidian District,
Beijing, 100096, People's Republic of China
Tel: (86) 10-5898-1000
Fax: (86) 10-5898-1100

www.hollysys.com

This product is distributed by:

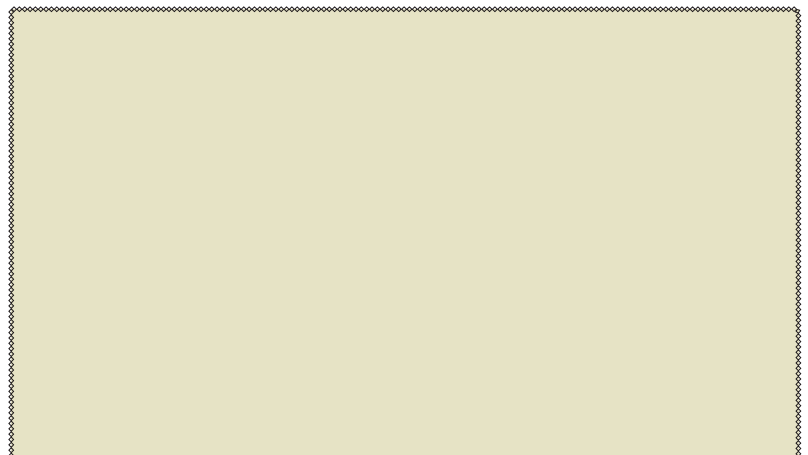

Visit our Web site for the latest information.
<http://www.hollysys.com>

All Rights Reserved. Copyright© 2008

Information found in this brochure is subject to changes without notice.

August/2008