

WSS小型伸缩十字轴式万向联轴器基本参数和主要尺寸 WSS small style flex universal couplings with spider basic parameters and size


WSS

产品特点:

- 1、适用于各种通用机械场合，最高转速可达1000转/分
- 2、连接更大的轴间距
- 3、每节最大转动角度为45度
- 4、有单节型和双节型
- 5、可带快速锁紧型
- 6、成品孔公差为H7，另可根据要求开键槽，六角孔和方孔

Characteristics:

- 1.Applicable to all kinds of general mechanical situation, Maximum rotate speed may reach 4000 r/min
- 2.Connects a bigger distance between shafts
- 3.Each point of the largest rotation angle can be 45°
- 4.Have single-jointed type and bimodal type
- 5.Fast locking is available
- 6.The hole of the Finished product tolerance is H7 according to. Spline, Hexagonal and Square holes are available as long as you request

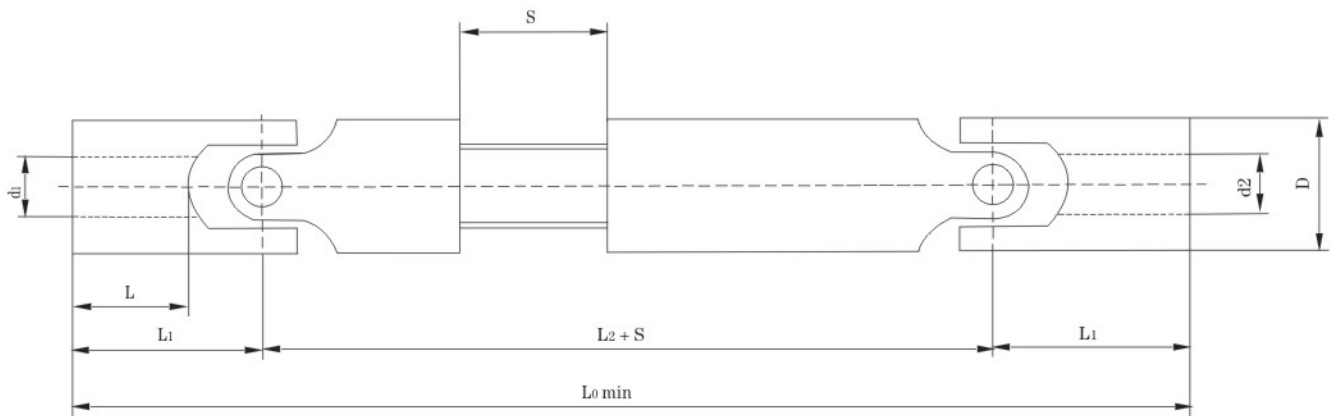

尺寸Size 型号Type	公称转矩 Nominal torque T _n N.m	D	d _{max}	L _{0max}	L	L ₁	L ₂	S
WSS2	22.4	20	12	176	22	32	112	30
WSS3	45	25	14	200	27	40	120	30
WSS4	71	32	18	243	30	46	151	35
WSS5	140	40	22	287	38	58	171	43
WSS6	280	50	28	337	44	69	199	50
WSS7	560	60	35	428	60	91	246	65
WSS8	1120	75	42	556	84	122	312	90

注：不同于表内轴孔连接尺寸，可按用户要求生产。

Note: the link size, which is different with the list, can be produced by the order of customer.